

2024 LIST PRICE SCHEDULE & PARTS LIST PRICING





MVP13-ACT



AW300H-ACT

ACT™ FEATURES

10+ years of premium corrosion protection
Over 250,000 valves installed in 2000+ plants
Available on ALL Hansen valves
Multi-layer protection
Lower cost of maintenance
Standard installation process



EZB-ACT



HT100-ACT



MCV40-1MCV-ACT

To Order: Add the “-ACT” suffix to standard model number; for example: GS200H-ACT, 2” HA4AW-ACT.
Note: For ACT pricing use [Technical Equipment Discount Schedule](#)

HANSEN TECHNOLOGIES GLOBAL SALES, DISTRIBUTION & TECHNICAL SUPPORT

Account Managers

Phill Beste
Cell: 630.670.1669
Email: pbeste@hantech.com

Daniel Sharpton
Cell: 706.870.0668
Email: dsharpton@hantech.com

Brad Gappa
Cell: 630.670.4499
Email: bgappa@hantech.com

IREP-Western US

Chris Herzog
Tel: 206.941.8095
Email: chris@irepcold.com

Jose Hernandez-Cruz
Tel: 909.331.5892
Email: jose@irepcold.com

President

Santhosh Kumar
Tel: 630.415.7763
Email: skumar@hantech.com

Principle Innovation Officer

Harold Streicher
Cell: 630.235.0169
Email: harold@hantech.com

Global Sales Manager

Jonathan Wirkus
Cell: 630.703.8002
Email: jwirkus@hantech.com

Technical Support

Toll: 800.426.7368
Email: support@hantech.com

S.E. Asia/Australia

Tay Seck Guan
Tel: 65.6408.6269
Cell: 65.9128.3608
Email: taysg@hantech.com

China/S.E. Asia

Chuck Chen / James Zhang
Tel: 86.21.3377.3513
Cell: 86.135.1212.4527
Email: cchen@hantech.com
Email: zlming@hantech.com

Europe/Middle East

Christian Birringer
Tel: +49 6825 9417397
Fax: +49 6825 9417398
Email: cbirringer@hansen-europe.com

Customer Service & Sales

Toll: 800.426.7368
Tel: 630.325.1565
Fax: 630.325.1572
Email: sales@hantech.com

24 Hour Emergency Support

Emergency Hotline: 866.244.4829
(during non-business hours only)

VALVES AND CONTROLS

Check Valves 14

Control Modules (Pilots for Pressure Regulators) 10

EZ-SRV™ Cartridge Pressure Relief Valves 19

Flanges & Adapter Rings 7

Float Switches 21

Gas-Powered Valves 12

Gauge, Purge & Transducer Valves 20

Hand Expansion Valves..... 17

Liquid Drain Ball Valves..... 15

MVP Multi-Valve Platform Valve Station..... **Now available in 2-1/2" 3" & 4"** 2

Pressure Regulators..... 8

Pressure Regulator Variations & Accessories..... 9

Pressure Relief Valves..... **New!** 18

Rupture Disc Assembly..... 18

Shut-Off Valves 16

See-Level™ Liquid Indicators..... **UL Recognized Component** 21

Solenoid Coils & Pilot Lights..... 6

Solenoid Valves 4

Stop/Check Valves 15

Strainers..... 7

TECHNICAL EQUIPMENT

Auto-Purgers 27

Defrost Controllers 25

Defrost Condensate Liquid Drainers 25

Float Drain Regulators 25

Gas Detection Sensors and Monitors 31

HPT Pressure/Temperature Transducer 30

MCV Motorized Control Valve..... 29

MCV Conversion Kits 30

Oil Temperature Valves..... 26

Pump Guardian/Constant Flow Regulators 32

PXV/PXVW Pulse Width Expansion Valve 26

Receiver Level Transducer Probes..... 24

Single Point Level Controls..... 24

Valve Controllers..... 29

Vari-Level Adjustable Level Controls..... 23

WLT Wire Level Transmitter 22

PARTS LIST

Parts List Pricing 33

Parts Kits-Quick Reference Guide..... 36

TERMS AND CONDITIONS

Approved Refrigerants 42


Customer Satisfaction Warranty, Terms & Conditions..... 40

Expedite Fee..... 42

Return Materials & Warranty Item Procedures 42

SOMETHING **BIG** IS COMING TO HANSEN'S MVP

- With the addition of the 2-1/2", 3" and 4" port sizes, HANSEN now offers the **LARGEST** and **MOST COMPLETE** integrated valve family.
- Featuring **ACT®** Anti-Corrosion Technology as standard!
- Now Evaporator Control Groups (stations) can be completely designed with MVP valves.
- 3-Positions (Stop-Control-Stop) for reduced pressure drop.
- Integrates HANSEN'S **INHERENTLY SAFER** HCK5D Two-Step Gas Powered Suction Stop Valves.

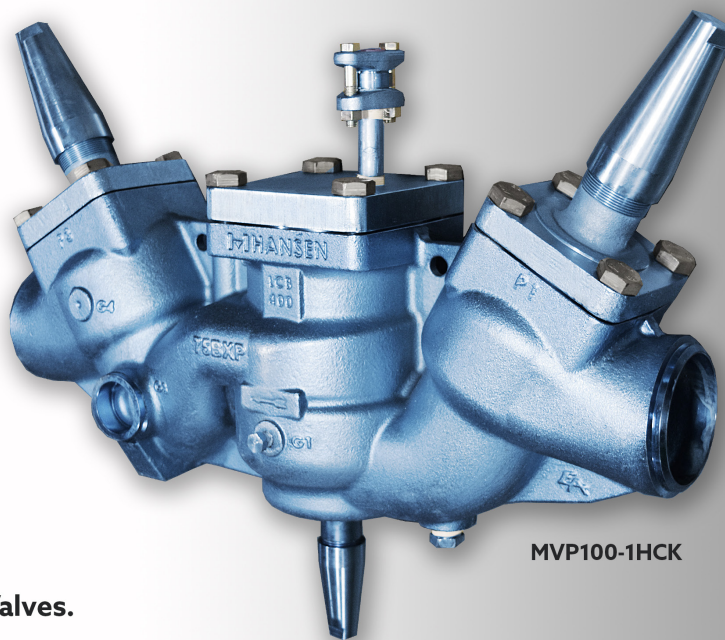


MVP100-1HCK

MVP MULTI-VALVE PLATFORM VALVE STATION

The MVP is a rugged, compact refrigerant control valve station offering multiple variations and functions to accommodate a wide range of capacities and application requirements. Standard features include manual opening stem, 60 mesh strainer (100 mesh strainer standard on MVP13), seal caps and 600 psig (41 bar g) pressure rating. Gauge port connections available. Interchangeable parts and parts kits with existing Hansen valves. Ships pre-tested and assembled for quick, easy two weld installation.

To Order: Specify MVP valve station size, configuration (1 thru 8) and connection size and style (SW/BW/ODS). Specify control valve configuration (solenoid/pressure regulator/motorized), coil voltage and connection (leaded or DIN), pressure setting range (See Page 8) and options if required. For Pressure Regulator Variations, see page 9 for List Extra pricing. Unless specified, Solenoid will have standard coil with 18" leads and 1/2" fitting, 115V; Pressure Regulators will have standard pressure range and factory setting. For Gas-Powered configurations (-1 and -8) add required HS8A pilot solenoid valve (see Page 4).

Approximate weight with solenoid control valve MVP13, 16 lbs (7 kg); MVP20-32, 35 lbs (16 kg); MVP40-50, 75 lbs (34 kg) MVP65-80, 190 lbs (86 kg); MVP100, 250 lbs (114 kg).



MVP WITH SOLENOID CONTROL VALVE

Model	Port Size inch (mm)	Connection inch (mm)	Configuration (Position 4)						
			SHUT-OFF	HAND EXP	STOP-CHECK/HAND EXP	STOP-CHECK	CHECK	BLANK	MCXV/MCR
			1	2	3	4	5	6	7
MVP13	1/2" (13)	1/2" (13)	\$2,067	\$2,096	\$2,361	\$2,335	\$2,055	\$1,786	\$8,269
		3/4" (20)	\$2,172	\$2,185	\$2,454	\$2,440	\$2,103	\$1,839	\$8,364
		1" BW (25)	\$2,269	\$2,292	\$2,565	\$2,535	\$2,152	\$1,884	\$8,467
MVP20	3/4" (20)	3/4" (20)	\$2,638	\$2,654	\$3,010	\$2,993	\$2,595	\$2,237	\$8,761
		1" (25)	\$2,728	\$2,793	\$3,152	\$3,084	\$2,639	\$2,283	\$8,903
		1-1/4" (32)	\$3,063	\$3,091	\$3,450	\$3,418	\$2,802	\$2,447	\$9,199
		1-1/2" BW (40)	\$3,551	\$3,684	\$4,042	\$3,911	\$3,048	\$2,694	\$9,791
MVP25	1" (25)	1" (25)	\$3,122	\$3,190	\$3,643	\$3,579	\$3,129	\$2,676	\$9,297
		1-1/4" (32)	\$3,459	\$3,488	\$3,942	\$3,912	\$3,301	\$2,841	\$9,593
		1-1/2" BW (40)	\$3,944	\$4,077	\$4,532	\$4,403	\$3,540	\$3,086	\$9,846
MVP32	1-1/4" (32)	1-1/4" (32)	\$3,568	\$3,592	\$4,202	\$4,171	\$3,598	\$2,992	\$9,700
		1-1/2" BW (40)	\$4,023	\$4,148	\$4,753	\$4,632	\$3,827	\$3,222	\$10,252
MVP40	1-1/2" (40)	1-1/2" (40)	\$4,801	\$4,911	\$5,612	\$5,501	\$4,786	\$4,088	\$11,728
		2" (50)	\$5,022	\$5,130	\$5,827	\$5,721	\$4,893	\$4,199	\$11,819
		2-1/2" BW (65)	\$5,591	\$5,982	\$6,675	\$6,291	\$5,176	\$4,476	\$12,668
MVP50	2" (50)	2" (50)	\$5,264	\$5,370	\$6,163	\$6,059	\$5,231	\$4,437	\$12,056
		2-1/2" BW (65)	\$5,833	\$6,227	\$7,015	\$6,627	\$5,513	\$4,721	\$12,475

MVP WITH PRESSURE REGULATOR CONTROL VALVE


Model	Port Size inch (mm)	Connection inch (mm)	Configuration (Position 4)					
			SHUT-OFF	HAND EXP	STOP-CHECK/ HAND EXP	STOP-CHECK	CHECK	BLANK
			1A*	2A*	3A*	4A*	5A*	6A*
MVP20	3/4" (20)	3/4" (20)	\$2,604	N/A	N/A	\$2,979	\$2,558	\$2,184
		1" (25)	\$2,700	N/A	N/A	\$2,742	\$2,606	\$2,234
		1-1/4" (32)	\$3,054	N/A	N/A	\$3,426	\$2,782	\$2,406
		1-1/2" BW (40)	\$3,566	N/A	N/A	\$3,516	\$3,038	\$2,665
MVP25	1" (25)	1" (25)	\$2,920	N/A	N/A	\$3,379	\$2,930	\$2,474
		1-1/4" (32)	\$3,258	N/A	N/A	\$3,716	\$3,101	\$2,643
		1-1/2" BW (40)	\$3,747	N/A	N/A	\$3,751	\$3,341	\$2,888
MVP32	1-1/4" (32)	1-1/4" (32)	\$3,404	N/A	N/A	\$4,015	\$3,442	\$2,831
		1-1/2" BW (40)	\$3,862	N/A	N/A	\$4,465	\$3,670	\$3,058
MVP40	1-1/2" (40)	1-1/2" (40)	\$4,633	N/A	N/A	\$5,330	\$4,612	\$3,915
		2" (50)	\$4,855	N/A	N/A	\$5,552	\$4,724	\$4,025
		2-1/2" BW (65)	\$5,424	N/A	N/A	\$5,463	\$5,792	\$6,474
MVP50	2" (50)	2" (50)	\$5,183	N/A	N/A	\$5,964	\$5,198	\$5,965
		2-1/2" BW (65)	\$5,738	N/A	N/A	\$6,529	\$6,027	\$6,793

Pressure Regulator Variation Reference	
Variation	List Adder
S	\$622
B	\$622
SB	\$971
D	\$1,144
L	\$337
O	\$509
K	\$110
P	\$168
M	\$1,598

*For Pressure Regulator Variations and Details add suffix (such as: S, B, D, L) and add List Adder, see above and Page 9

LARGE MVP -ACT is Standard

Model	Port Size Inch (mm)	Connection Inch (mm)	P1 = SHUT-OFF, P2 = CONTROL, P3 = SHUT-OFF				
			MVP-1 SOLENOID	MVP-1A REGULATOR*	MVP-1HCK GAS-POWERED	MVP-1MCV MOTORIZED	MVP-8HCK GAS-POWERED
MVP65	2-1/2" (65)	2-1/2" BW (65)	\$7,039	\$6,524	\$7,164	\$11,979	\$5,903
MVP80	3" (80)	3" BW (80)	\$10,246	\$9,437	\$9,313	\$14,891	\$8,550
MVP100	4" (100)	4" BW (100)	\$14,517	\$14,514	\$13,628	\$19,916	\$11,902

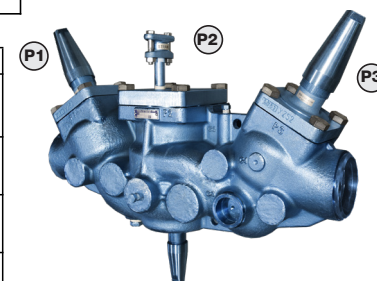

MVP-1HCK

*See Pressure Regulator Variation Reference above

*note: -6 is a blank in position 3, -8 is a blank in position 1.

MVP Options	Port Size			
	MVP13 1/2" (13 mm)	MVP20 to MVP32 3/4" to 1-1/4" (20 to 32 mm)	MVP40 to MVP50 1-1/2" to 2" (40 to 50 mm)	MVP65 to MVP100 2-1/2" to 4" (65 to 100 mm)
MCV/MCR=Motorized Control Valve*	List Extra \$5306	List Extra \$5123	List Extra \$5291	See Above MCV-1MCV
NO=Normally Open, List Extra per coil	Contract Factory	Contact Factory	Contact Factory	Contact Factory
E=Extended Neck and Stainless Steel Trim on SOV (1 & 4 Only)	List Extra \$201	List Extra \$314	List Extra \$364	—
H=Handwheels and Bar Handle on HEV	List Extra \$104	List Extra \$100	List Extra \$162	—
S=100 Mesh Strainer Basket	STANDARD	List Extra \$189	List Extra \$190	—
X=Explosion Proof Solenoid Coil, List Extra per coil	—	Contact Factory	Contact Factory	Contact Factory
D=Drain Plug, Strainer	List Extra \$36	Standard	Standard	—
SD=Two Step Solenoid	—	List Extra \$1078	List Extra \$1077	—

* For Motorized Control Valve in Position 4, See above MVP WITH SOLENOID CONTROL VALVE - Configuration #7

SOLENOID VALVES

Flanged and Weld-in

(For Ammonia, Halocarbons, CO₂)

For use in liquid, suction, hot gas, discharge and purge lines. Compact and reliable. Tested to ensure reliable operation, safety and tightness.

To Order: Specify model, port size, connection style and size, coil connection style, voltage, and strainer; weld-in or ACT if required. Unless specified, standard coil with 1/2" fitting will be supplied; DIN Coil with Socket, **List Extra \$17**

HS4AX Explosion Proof (Class I, Division II) available (115V Standard, 230V or 24 VAC),

List Extra Contact Factory

Normally Open Solenoid, **List Extra Contact Factory.**



HS8A with Strainer

HS8W with Strainer

HS4A

HS4W

LESS STRAINER

Model	Port Size inch (mm)	Flange Styles and Sizes Connections Available				List Price Less Strainer with Flanges		List Price Weld-In Less Strainer	Weld-in Styles and Sizes Available	Weight lbs (kg)
		FPT, SW, WN (DN)		ODS (DN/ODS) (Standard)	FPT, SW	WN, ODS				
		Standard	Also							
HS2+	5/32" (4)	1/2" (15)	1/4", 3/8" (7,10)	—	\$479	—	—	—	2 (0.9)	
HS2F	5/32" (4)	1/2" (15)	1/4", 3/8", 3/4" (7,10,20)	5/8" (16)	\$503	\$539	—	—	3 (1.4)	
HS2B	5/32" (4)	1/4" (7)	—	—	\$508	—	—	—	2 (0.9)	
HS6	5/32" (4)	1/2" (15)	1/4", 3/8", 3/4" (7,10,20)	5/8" (16)	\$534	\$570	—	—	4 (1.8)	
HS8A	1/2" (13)	1/2" (15)	3/8", 3/4" (10,20)	5/8" (16)	\$655	\$691	—	—	5 (2.3)	
HS7	3/4" (20)	3/4" (20)	1", 1 1/4" (25,32)	7/8" (22)	\$898	\$938	—	—	17 (7.7)	
	1" (25)	1" (25)	1 1/4" (32)	1 1/8" (28)	\$1,148	\$1,188	—	—	17 (7.7)	
	1 1/4" (32)	1 1/4" (32)	1 1/2" WN** (40)	1 3/8" (35)	\$1,418	\$1,458	—	—	17 (7.7)	
HS4A HS4W	3/4" (20)	3/4" (20)	1", 1 1/4" (25,32)	7/8" (22)	\$999	\$1,039	\$1,228	3/4", 1", 1-1/4" SW	23 (10)	
	1" (25)	1" (25)	1 1/4" (32)	1 1/8" (28)	\$1,183	\$1,223	\$1,444	1", 1-1/4" SW	23 (10)	
	1 1/4" (32)	1 1/4" (32)	1 1/2" WN** (40)	1 3/8" (35)	\$1,426	\$1,466	\$1,728	1-1/4" SW	23 (10)	
	1 1/2" (40)	1 1/2" (40)	2" (50)	1 5/8" (42)	\$1,991	\$2,033	\$2,324	1-1/2", 2" SW	47 (21)	
	2" (50)	2" (50)	—	2 1/8" (54)	\$2,183	\$2,225	\$2,567	2" SW	47 (21)	
	2 1/2" (65)	2 1/2" (65)	3" (80)	2 5/8" (67)	\$2,992	\$3,051	\$3,497	2-1/2" SW	75 (34)	
	3" (80)	3" (80)	—	3 1/8" (79)	\$4,335	\$4,446	\$5,018	3" BW	86 (39)	
	4" (100)	4" (100)	—	4 1/8" (105)	\$6,194	\$6,362	\$6,913	4" BW	134 (61)	
5" (125)	5" BW (125)	—	—	—	—	\$9,968	5" BW	250 (113)		
6" (150)	6" BW (150)	—	—	—	—	\$15,686	6" BW	270 (122)		

WITH STRAINER

Model	Port Size inch (mm)	Flange Styles and Sizes Connections Available				List Price With Strainer and Flanges		List Price Weld-In* With Strainer	Weld-in Styles and Sizes Available	Weight lbs (kg)
		FPT, SW, WN (DN)		ODS (DN/ODS) (Standard)	FPT, SW	WN, ODS				
		Standard	Also							
HS6	5/32" (4)	1/2" (15)	1/4", 3/8" (7, 10)	5/8" (16)	\$680	\$716	—	—	6 (2.7)	
HS8A	1/2" (13)	1/2" (15)	3/4" (20)	5/8" (16)	\$801	\$837	—	—	7 (3.2)	
HS8W	1/2" (13)	—	—	—	—	—	\$1,002	1/2", 3/4" SW 1/2", 3/4" 1" BW	7 (3.2)	
HS7	3/4" (20)	3/4" (20)	1", 1 1/4" (25, 32)	7/8" (22)	\$1,247	\$1,287	—	—	26 (12)	
	1" (25)	1" (25)	1 1/4" (32)	1 1/8" (28)	\$1,497	\$1,537	—	—	26 (12)	
	1 1/4" (32)	1 1/4" (32)	1 1/2" WN** (40)	1 3/8" (35)	\$1,767	\$1,807	—	—	26 (12)	
HS4A HS4W	3/4" (20)	3/4" (20)	1", 1 1/4" (25, 32)	7/8" (22)	\$1,348	\$1,388	\$1,967	3/4", 1", 1-1/4" SW	32 (15)	
	1" (25)	1" (25)	1 1/4" (32)	1 1/8" (28)	\$1,532	\$1,572	\$2,183	1", 1-1/4" SW	32 (15)	
	1 1/4" (32)	1 1/4" (32)	1 1/2" WN** (40)	1 3/8" (35)	\$1,775	\$1,815	\$2,467	1-1/4" SW	32 (15)	
	1 1/2" (40)	1 1/2" (40)	2" (50)	1 5/8" (42)	\$2,750	\$2,792	\$3,694	1-1/2", 2" SW	79 (36)	
	2" (50)	2" (50)	—	2 1/8" (54)	\$2,942	\$2,984	\$3,937	2" SW	79 (36)	
	2 1/2" (65)	2 1/2" (65)	3" (80)	2 5/8" (67)	\$4,045	\$4,104	\$5,476	2-1/2" SW	125 (57)	
	3" (80)	3" (80)	—	3 1/8" (79)	\$5,605	\$5,716	\$7,435	3" BW	150 (68)	
	4" (100)	4" (100)	—	4 1/8" (105)	\$8,701	\$8,869	\$10,826	4" BW	236 (107)	
5" (125)	—	—	—	—	—	\$15,057	5" BW	500 (227)		
6" (150)	—	—	—	—	—	\$24,542	6" BW	540 (245)		

**1-1/2" WN Flanges List Extra \$278

* Weld-in valves supplied as separate pieces, not as welded assemblies.

HS2 † has threaded end connections instead of flanges.

Note: Valves less flanges for replacement, deduct list price of equivalent flange kit from above, see page 7. Strainer 1/4" plug standard ST100, 1/4" plug optional **ST050D**, **List Extra \$35**. Close-coupled HCK4 check valves also available, refer to page 14. 1 1/4" is standard 2-bolt flange design; 4-bolt flange style available to replace 1 1/4" R/S, **HS4A-4 10% List Extra**. Valves for CO₂, contact factory.

HS4D/HS4DW TWO STEP DUAL SOLENOID VALVE

Flanged and Weld-in

This heavy duty, reliable two step dual solenoid design allows for closed, partially open and fully open valve positions. Reverts to closed position in the event of power failure. Includes two encapsulated solenoid coils. Available with close-coupled strainer/check valve and optional wireless pilot lights. Flange-to-flange drop in for standard HS4A.

To Order: Specify model, port size, connection style and size, coil connection style, voltage, and strainer, weld-in or ACT if required. Unless specified, standard coil with 1/2" fitting will be supplied.



HS4D

LESS STRAINER

Model	Port Size inch (mm)	Flange Styles and Sizes Connections Available				List Price Less Strainer with Flanges		List Price Weld-In Less Strainer	Weld-in Styles and Sizes Available	Weight lbs (kg)	
		FPT, SW, WN (DN)		ODS (DN/ODS) (Standard)	FPT,SW	WN,ODS					
		Standard	Also								
HS4D HS4DW	3/4" (20)	3/4" (20)	1", 1 1/4" (25,32)	7/8" (22)	\$2,099	\$2,139	\$2,308	3/4", 1", 1-1/4" SW	30	(13.6)	
	1" (25)	1" (25)	1 1/4" (32)	1 1/8" (28)	\$2,124	\$2,164	\$2,376	1", 1-1/4" SW	30	(13.6)	
	1 1/4" (32)	1 1/4" (32)	1 1/2" WN** (40)	1 3/8" (35)	\$2,225	\$2,265	\$2,510	1-1/4" SW	30	(13.6)	
	1 1/2" (40)	1 1/2" (40)	2" (50)	1 5/8" (42)	\$2,866	\$2,908	\$3,172	1-1/2" , 2" SW	58	(26)	
	2" (50)	2" (50)	—	2 1/8" (54)	\$3,220	\$3,262	\$3,572	2" SW	58	(26)	
	2 1/2" (65)	2 1/2" (65)	—	2 5/8" (67)	\$3,814	\$3,873	\$4,269	2-1/2" SW	90	(41)	
	3" (80)	3" (80)	—	3 1/8" (79)	\$5,607	\$5,718	\$6,225	3" BW	100	(45)	
	4" (100)	4" (100)	—	4 1/8" (105)	\$7,417	\$7,585	\$8,183	4" BW	138	(63)	

WITH STRAINER

Model	Port Size inch (mm)	Flange Styles and Sizes Connections Available				List Price With Strainer and Flanges		List Price Weld-In* With Strainer	Weld-in Styles and Sizes Available	Weight lbs (kg)	
		FPT, SW, WN (DN)		ODS (DN/ODS) (Standard)	FPT,SW	WN,ODS					
		Standard	Also								
HS4D HS4DW	3/4" (20)	3/4" (20)	1", 1 1/4" (25, 32)	7/8" (22)	\$2,448	\$2,488	\$3,047	3/4", 1", 1-1/4" SW	44	(20)	
	1" (25)	1" (25)	1 1/4" (32)	1 1/8" (28)	\$2,473	\$2,513	\$3,115	1", 1-1/4" SW	44	(20)	
	1 1/4" (32)	1 1/4" (32)	1 1/2" WN** (40)	1 3/8" (35)	\$2,574	\$2,614	\$3,249	1-1/4" SW	44	(20)	
	1 1/2" (40)	1 1/2" (40)	2" (50)	1 5/8" (42)	\$3,625	\$3,667	\$4,542	1-1/2" , 2" SW	99	(45)	
	2" (50)	2" (50)	—	2 1/8" (54)	\$3,979	\$4,021	\$4,942	2" SW	99	(45)	
	2 1/2" (65)	2 1/2" (65)	3" (80)	2 5/8" (67)	\$4,867	\$4,926	\$6,248	2-1/2" SW	158	(72)	
	3" (80)	3" (80)	—	3 1/8" (79)	\$6,877	\$6,988	\$8,642	3" BW	179	(81)	
	4" (100)	4" (100)	—	4 1/8" (105)	\$9,924	\$10,092	\$12,096	4" BW	266	(121)	

* Weld-in valves supplied as separate pieces, not as welded assemblies.

**1-1/2" WN Flanges List Extra \$278

ENCAPSULATED SOLENOID COILS

Watertight encapsulated solenoid coils. Available with 18" (450 mm) wire leads with 1/2" NPSM fitting for conduit, and plug-in DIN connection socket. Wire leads are standard for 115V, 208/230V, or 24V; 50/60Hz. Weight 1 lb (0.5 kg).

To Order: Specify catalog number, voltage and connection.

Encapsulated Solenoid Coil Kit (Coil, Knob & O-Ring)			
Catalog No.	Voltage	Connection	List Price
70-1085	115V	18" leads, 1/2" NPSM conduit	\$134
70-1086	230V	18" leads, 1/2" NPSM conduit	
70-1087	24VAC	18" leads, 1/2" NPSM conduit	
Plug-in Encapsulated Solenoid Coil Kit (Coil, Knob & O-Ring)			
70-1088	115V	Plug-in less DIN socket	\$137
70-1089	230V	Plug-in less DIN socket	
70-1090	24VAC	Plug-in less DIN socket	
70-1091	24VDC	Plug-in less DIN socket	
Plug-in Encapsulated Solenoid Coil with DIN Socket Kit (Coil, Knob & O-Ring)			
70-1092	115V	Plug-in with DIN socket	\$151
70-1093	230V	Plug-in with DIN socket	
70-1094	24VAC	Plug-in with DIN socket	
70-1095	24VDC	Plug-in with DIN socket	
Solenoid Coil Kit with Conduit Connection (Replacement Coil for use with AP Purgers)			
70-1155	115V	Conduit (60" leads)	\$142
70-1156	230V	Conduit (60" leads)	



Standard Coil



Plug-in Coil



Plug-in Coil with DIN Socket

BEACON PILOT LIGHTS AND ADAPTER KITS FOR SOLENOID COILS

Convenient and easy to install; no extra wiring required. Designed to sit atop all solenoid coils except normally open solenoid model. Kits include pilot light, o-ring and knob.

To Order: Specify catalog number.

Catalog No.	Description	List Price
70-1100	RED Pilot Light Kit; AC Coils Only	\$117
70-1101	AMBER Pilot Light Kit; AC Coils Only	
70-1102	GREEN Pilot Light Kit; AC Coils Only	



Beacon Pilot Light Kit

FLANGES & ADAPTER RINGS

Hansen flanges through 1 1/4" (32 mm) port are the 2-bolt oval flange style, standard. From 1 1/2" to 4" (40 to 100 mm), the standard is 4-bolt square. All flanges are male tongue only. ODS solder flange construction is steel bored to accept copper tubing.



WN Flange
2-Bolt

SW Flange
4-Bolt

To Order Flange Kits: Specify flange size, and connection style and size. Example: Number 100 Flange Kit with 3/4" FPT. For a union, order Union Kit plus appropriate Flange Kit. Contains one pair of flanges (of the same size and style) without bolts, nuts or gaskets for a Hansen flanged valve.

If ordering flange gaskets in quantities of 12 or more, **Deduct Extra 50%.**

To Order Adapter Rings: Specify FAR (Female Adapter Rings) or MAR (Male Adapter Rings), and flange size.

To Order Union Kits: Specify model number. Contains one female adapter ring, bolts, nuts and two flange gaskets.

For Valve Port Size	Flange Size	Flange Connection Size (All Flanges are Male Tongue Only)		Flange Connection Style			Adapter Rings				Union Kit			
				FPT or SW Flange Kit	WN or ODS Flange Kit	Weight lbs (kg)	MAR Model	List Price	FAR Model	List Price	Model	List Price		
		FPT, SW, WN, (DN)	ODS (DN/ODS)	List Price	List Price									
up to 1/2"	050	1/2", 3/8", 1/2", 3/4"	(7, 10, 13, 20)	3/4"	(16)	\$85	\$121	1 (0.5)	70-0142	\$47	70-1034	\$38	UK050	\$76
3/4", 1", 1 1/4"	100	3/4", 1", 1 1/4" WN	(20, 25, 32)	7/8", 1 1/8", 1 1/4"	(22, 28, 35)	\$107	\$147	3 (1.4)	70-0266	\$55	70-1035	\$50	UK100	\$96
	100	1 1/2" WN	(40)	-	-	-	\$425	5 (2.3)						
		SW, WN, (DN)	ODS (D/OD)	SW Flange Kit	WN or ODS Flange Kit	Weight lbs (kg)	Adapter Rings				Union Kit			
1 1/2", 2"	200	1 1/2", 2"	(40, 50)	1 5/8", 2 1/8"	(42, 54)	\$169	\$211	8 (3.6)	72-0037	\$76	75-1043	\$134	UK200	\$210
2 1/2"	250	2 1/2", 3"	(65)	2 3/4"	(67)	\$290	\$349	15 (6.8)	72-0055	\$87	75-1044	\$169	UK250	\$243
3"	300	3"	(80)	3 3/4"	(79)	\$329	\$440	14 (6.4)	72-0056	\$90	75-1045	\$191	UK300	\$271
4"	400	4"	(100)	4 3/4"	(105)	\$504	\$672	22 (10)	72-0057	\$131	75-1046	\$249	UK400	\$353

REFRIGERANT STRAINERS (FILTERS)

For refrigerants or oil. Close-couples to flanged valves, 60 Mesh (233 micron) stainless steel screen, ST050 has 100 Mesh (150 micron), 1/2" threaded pumpout plug standard ST200 & larger; 1/4" plug standard ST100, 1/4" plug optional ST050D

To Order: Specify catalog number and connections. When ordering less flanges for close-coupling, specify for close-coupling to receive correct length bolts. WN or ODS flanges available at extra cost. Weld-in connections: 3/4" thru 2" (20 to 50mm) SW inlet x BW outlet; 2 1/2" (65 mm) SW; 3" to 6" (80 to 150 mm) BW. For CO₂ service, contact factory.

Options for Strainers

Perforated Metal Strainer Basket: For protection of compressors in suction side port applications 1 1/2" to 3" (40 to 80 mm); contact factory.

Cloth (Filter) Bags: Available 3/4" to 4" (20 to 100 mm) for system start-up, see Page 37. Requires ST100HD heavy duty strainer basket.



ST200


For Valve Size inch (mm)	Model	List Price			Weight lbs (kg)
		FPT, SW ‡ †	Less Flanges	Weld-In	
5/32" - 1/2" (4-13)	ST050	\$269	\$146	—	3 (1.4)
	ST050D†	\$304	\$181		
3/4" - 1 1/4" (20-32)	ST100, STW100	\$506	\$349	\$739	14 (6.4)
	ST100HD, STW100HD*	\$584	\$427	\$819	
	ST100/100, STW100/100**	\$695	\$538	\$928	
1 1/2" - 2" (40-50)	ST200, STW200	\$1,062	\$759	\$1,370	41 (19)
	ST200/100, STW200/100**	\$1,388	\$1,085	\$1,700	
2 1/2" (65)	ST250, STW250	\$1,512	\$1,053	\$1,979	68 (31)
	ST250/100, STW250/100**	\$2,009	\$1,550	\$2,474	
3" (80)	ST300, STW300	\$1,790	\$1,270	\$2,417	79 (36)
4" (100)	ST400, STW400	\$3,260	\$2,507	\$3,913	128 (58)
5" (125)	STW500	—	—	\$5,089	240 (109)
6" (150)	STW600	—	—	\$8,856	260 (118)

‡ WN or ODS flanges also available; see above

† ST050D includes drain plug.

* Includes stainless steel screen with perforated metal backup.

** 100 mesh (150 micron rating) stainless steel screen.



STW


HA4A/HA4W REFRIGERANT PRESSURE REGULATORS

Flanged and Weld-in (For Ammonia, Halocarbons, CO₂)

The complete line of modular Pressure Regulators has been designed for simple, reliable operation. These pressure regulators use a series of easily changed, screw-in control modules (pilots) to determine regulating functions. Shipped fully assembled and 100% pressure tested. CRN Registration and CSA Certification standard.

To Order: Specify model, port size, connection style and size, range, and strainer; weld-in or ACT if required.

Explosion Proof (Class I, Division II) available: HA4ADX, HA4ASX and HA4ABX (120 V STD), **List Extra Contact Factory.**
Normally open pilot solenoid (HA4ADNO, HA4ASNO, HA4ABNO), **List Extra Contact Factory**

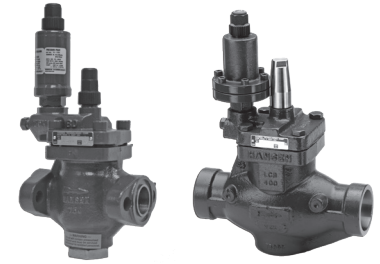

HA4A

HA4W

LESS STRAINER

Model	Port Size inch (mm)	Flange Styles and Sizes Connections Available			List Price Less Strainer with Flanges		List Price Weld-In Less Strainer	Weld-in Styles and Sizes Available	Weight lbs (kg)
		FPT, SW, WN (DN)		ODS (DN/ODS) Standard	FPT,SW	WN,ODS			
		Standard	Also						
HA4A HA4W	¾"† (20)	¾" (20)	1", 1¼", 1½" (25, 32)	⅞" (22)	\$798	\$838	\$1,009	¾", 1", 1-1/4" SW	26 (12)
	1" (25)	1" (25)	1¼", 1½" (32)	1⅞" (28)	\$971	\$1,011	\$1,230	1", 1-1/4" SW	26 (12)
	1½" (32)	1½" (32)	1½" WN** (40)	1⅞" (35)	\$1,252	\$1,292	\$1,552	1-1/4" SW	26 (12)
	1½" (40)	1½" (40)	2" (50)	1⅞" (42)	\$1,809	\$1,851	\$2,137	1-1/2", 2" SW	50 (23)
	2" (50)	2" (50)	—	2⅞" (54)	\$2,074	\$2,116	\$2,460	2" SW	50 (23)
	2½" (65)	2½" (65)	3" (80)	2⅞" (67)	\$2,728	\$2,787	\$3,230	2-1/2" SW	78 (35)
	3" (80)	3" (80)	—	3⅞" (79)	\$3,778	\$3,889	\$4,457	3" BW	89 (40)
	4" (100)	4" (100)	—	4⅞" (105)	\$5,637	\$5,805	\$6,485	4" BW	137 (62)
	5" (125)	—	—	—	—	—	\$9,171	5" BW	250 (113)
6" (150)	—	—	—	—	—	\$15,567	6" BW	270 (122)	

WITH STRAINER

Model	Port Size inch (mm)	Flange Styles and Sizes Connections Available			List Price With Strainer and Flanges		List Price Weld-In* With Strainer	Weld-in Styles and Sizes Available	Weight lbs (kg)
		FPT, SW, WN (DN)		ODS (DN/ODS) Standard	FPT,SW	WN,ODS			
		Standard	Also						
HA4A HA4W	¾"† (20)	¾" (20)	1", 1¼" (25, 32)	⅞" (22)	\$1,147	\$1,187	\$1,748	¾", 1", 1-1/4" SW	35 (16)
	1" (25)	1" (25)	1¼" (32)	1⅞" (28)	\$1,320	\$1,360	\$1,969	1", 1-1/4" SW	35 (16)
	1½" (32)	1½" (32)	1½" WN** (40)	1⅞" (35)	\$1,601	\$1,641	\$2,291	1-1/4" SW	35 (16)
	1½" (40)	1½" (40)	2" (50)	1⅞" (42)	\$2,568	\$2,610	\$3,507	1-1/2", 2" SW	82 (37)
	2" (50)	2" (50)	—	2⅞" (54)	\$2,833	\$2,875	\$3,830	2" SW	82 (37)
	2½" (65)	2½" (65)	3" (80)	2⅞" (67)	\$3,781	\$3,840	\$5,209	2-1/2" SW	128 (58)
	3" (80)	3" (80)	—	3⅞" (79)	\$5,048	\$5,159	\$6,874	3" BW	153 (69)
	4" (100)	4" (100)	—	4⅞" (105)	\$8,144	\$8,312	\$10,398	4" BW	239 (108)
	5" (125)	5" BW (125)	—	—	—	—	\$14,260	5" BW	500 (227)
6" (150)	6" BW (150)	—	—	—	—	\$24,423	6" BW	540 (245)	

* Weld-in-line valves supplied as separate pieces, not as welded assemblies.

† 25% & 50% Reduced Capacity Plugs are available.

Note: Valves less flanges for replacement, deduct list price of equivalent flange kit from above, see page 7. Close-coupled HCK4 check valves also available, refer to page 14. 1¼" is standard 2-bolt flange design; 4-bolt flange style available to replace 1¼" (32 mm) R/S, **H4A4-4, 10% List Extra.**
For CO₂ service, contact factory.

**1-1/2" WN Flanges List Extra \$278

REGULATOR PRESSURE SETTINGS

The HA4A regulator family can control temperature, inlet, outlet, or differential pressure. Regulator variations are available that enable one regulator to perform several functions. Combinations of variations also available.

Regulators include a manual opening stem, and ¼" FPT gauge port. Shipped fully assembled and tested.

HA4A Standard Regulator includes upstream pressure control module. Controls inlet pressure for evaporator, condenser or heat recovery control or defrost relief.

Single Control Module: Range A, 0 to 150 psig (0 to 10 bar g)

Alternates: Range B, 30 to 300 psig (2 to 21 bar g)

Range C, 100 to 550 psig (6 to 38 bar g) **List Extra \$265 note "requires CO2 rated valve"**

Range D, 30 to 450 psig (0 to 31 bar g)

Range V, 20" to 130 psig (-0.67 to 9 bar g) **List Extra \$282**

PRESSURE REGULATOR VARIATIONS

To Order: Specify regulator model, port size, flange connection style and size, range, coil connection style, voltage if applicable, combination of variation and special variation options desired, and strainer if required. Optional strainers are generous close-coupled, 60 mesh (233 Micron Rating) or 100 mesh accessible (150 Micron Rating). **Explosion Proof (Class I, Division II) available, List Extra Contact Factory.**

Variation	Description	Range					List Extra
		A	B	C	D	V	
S	Electric Shut-Off Controls pressure when electrically energized; closed when not energized. For temperature control and defrost, or similar uses. Specify voltage, range, and special variation if required.	✓	✓	✓	✓	✓	\$622
B	Electric Wide-Opening Controls pressure when not electrically energized; open when energized. For defrost regulation or heat recovery and wide-opening for maximum cooling or similar. Specify voltage, range, and special variation if required.	✓	✓	✓	✓	✓	\$622
SB	Electric Wide-Opening and Shut-off Closed when both coils not energized. Controls pressure when SI coil electrically energized. Open when P coil is electrically energized. For defrost regulation or similar uses or wide-opening for maximum cooling.	✓	✓	✓	✓	✓	\$971
D	Dual Pressure Regulator Controls at lower pressure when electrically energized, at higher pressure when not energized. Used for two pressure (temperature) control or defrost pressure relief and pressure (temperature) control. Specify voltage, range, and special variation if required.	✓	✓	✓	✓	✓	\$1,144
L	Differential Pressure For pump relief, oil control, or any differential pressure control.	✓					\$337
O	Outlet Pressure Opens as outlet pressure drops. For hot gas bypass to suction, crankcase pressure control, or for receiver pressure control.		✓			✓	\$509
K	Reseating Relief Defrost relief or high-to-low system relief. Set and Tagged. Specify Setting; otherwise setting will be at 70 psig (4.8 bar).	✓	✓	✓	✓		\$110
R	Regulator only with External Connection for Remote Pilot See pages 10 and 11 for AR1, AR3 and M3E25 External Connection.						See Pages 10 and 11
P	Pneumatically Compensated Air pressure or other pressure in bonnet raises inlet pressure setting at 1:1 ratio.	✓				✓	\$168
M	Electric Motor Compensated "M" Hardware CAM and Pilot (Less Motor) Commonly used for precise room temperature control or liquid chiller control. A motor changes regulator pressure setting in accordance with temperature controller. Includes control module, cam, motor bracket. Specify low rise or high rise cam and range.	✓	✓			✓	\$1,598
Options	Honeywell Motor & Mounting Kit, Part No. 75-0844						\$3,292
	Honeywell Mounting Kit, Part Number 75-1143						\$47
	115VAC/230VAC: 24VAC Transformer TR40, Part Number 75-0718						\$360

PRESSURE REGULATOR ACCESSORIES

Quality bottom mount gauges with 3½" (90 mm) diameter face and safe plastic lens; ¼" MPT connection. Stainless steel gauge features ¼" stainless steel NPT bottom connection, glycerine filled with clear polycarbonate lens. Scale is printed in pressure and temperature.

To Order: Specify model number.















GA1-S

Model	Description	List Price
GA1	Ammonia Gauge (psi/degree F) 30" to 300 psig	\$250
GA1M	Ammonia Gauge (bar/degree C) -1 to 11 bar	
GA2	Ammonia Gauge (psi/degree F) 30" to 150 psig	
GA2M	Ammonia Gauge (bar/degree C) -1 to 21 bar	
G3	Halocarbon/Ammonia Gauge (psi/bar only) 30" to 350 psig	\$250
G4	Halocarbon/Ammonia Gauge (psi/bar only) 30" to 150 psig	
HGV1	HGV1 Long Neck® Gauge Valve, ¼" MPT x FPT	\$139
GA1-S	Stainless Steel Ammonia Gauge (psi/degree F) 30" to 300 psig	\$397
GA1M-S	Stainless Steel Ammonia Gauge (bar/degree C) -1 to 11 bar	
GA2-S	Stainless Steel Ammonia Gauge (psi/degree F) 30" to 150 psig	
GA2M-S	Stainless Steel Ammonia Gauge (bar/degree C) -1 to 21 bar	
G5M-S	Stainless Steel Halocarbon Gauge (bar/degree C) -1 to 12 bar	\$397
G6M-S	Stainless Steel Halocarbon Gauge (bar/degree C) -1 to 25 bar	

CONTROL MODULES (PILOTS) FOR REGULATORS

Control modules enable the main regulator to perform different control functions. Pilots are factory installed, or can be retrofitted. Non-rising stem can be adjusted by using a ¼" wrench. Catalog numbers are for the screw-on pilot module.

To Order: Specify control module catalog number, range, setting and coil connection style and voltage if applicable.

Control Module	Description	List Price	Weight lbs (kg)
	Inlet Pressure. Specify Range.		
	Range A: Part Number 75-1097	\$472	5 (2)
	Range B: Part Number 75-1098		
	Range D: Part Number 75-1205	\$737	
Range C: Part Number 75-1204	\$754		
	Inlet Pressure. Range A: Part Number 75-1126	\$472	5 (2)
	M3W compact welded pressure pilot is standard on ¾" to 1¼" (20 to 32mm) valves.		
	Solenoid. Part Number 70-1052 Normally Closed	\$229	1 (.5)
	Facilitates on/off control of flow through control module. <i>Requires solenoid coil, see page 8 for selection.</i>		
	Part Number 70-1113 Normally Open	\$508	1 (.5)
	Outlet Pressure. Specify Range.		6 (3)
	Range B: Part Number 75-1101 Range V: Part Number 75-1100	\$903	
	Differential Pressure. Range A: Part Number 75-1081	\$624	5 (2)
		\$907	
	Pneumatically Compensated. Range A: Part Number 75-1081	\$624	5 (2)
	Air or other pressure in bonnet raises inlet pressure setting on a 1:1 ratio.		
	Range V: Part Number 75-1249	\$907	
	Reseating Relief. Set and Tagged. Specify Range and Setting.		5 (2)
	Range A: Part Number 75-1103	\$564	
	Range B: Part Number 75-1104		
	Range D: Part Number 75-1203		
	Standard setting (for ammonia defrost) 70 psig (4.8 bar).		
	Range C: Part Number 75-1202	\$833	
	Reseating Relief. Range A: Part Number 75-1127	\$564	5 (2)
	Compact welded pressure pilot is standard on valves sizes ¾" to 1¼" (20 to 32 mm). Standard setting (for ammonia defrost) 70 psig (4.8 bar).		
	External Connection. Part Number 35-1015	\$183	1 (.5)
	Enables a remote pressure source to be introduced to the regulator via a pilot line (replaces a pilot). ¼" FPT with separate 4" (100 mm) long weld nipple.		
	Stopping Plugs. Part Number 75-1063	\$44	.5 (.2)
	To be used in regulator's pilot valve port when port is not utilized. Stopping plugs have square head and are marked with "0".		
	Straight Through Plugs. Part Number 75-1064	\$44	.5 (.2)
	To be used in regulator's pilot valve port when port is not utilized. Straight through flow plugs have a hex head and are marked with "1".		
	Electric Motor. Specify Range. (Module Only)		5 (2)
	Range A: Part Number 75-1193	\$553	
	Range B: Part Number 75-1283		
	Range V: Part Number 75-1285	\$837	

MODULAR REGULATOR BODIES

Modular regulator bodies less pilots and less flanges. Model AR1 (one pilot port) and Model AR3 (three pilot ports). Includes flange gaskets, bolts and nuts, and a plugged 1/4" outlet pressure access port for connecting outlet or differential control module sensing lines or gauges.

To Order: Specify model number and port size.

AR1, LESS FLANGES

Model	Port Size inch (mm)	List Price	Weight lbs (kg)	
		Less Flanges		
75-1082	3/4" (20)	\$683	24	(11)
75-1083	1" (25)	\$727	24	(11)
75-1084	1 1/4" (32)	\$995	24	(11)
75-1085	1 1/2" (40)	\$1,446	48	(22)
75-1086	2" (50)	\$1,756	48	(22)
75-1087	2 1/2" (65)	\$2,286	76	(34)
75-1088	3" (80)	\$3,308	87	(40)
75-1089	4" (100)	\$4,980	135	(61)



AR1

AR3, LESS FLANGES

Model	Port Size inch (mm)	List Price	Weight lbs (kg)	
		Less Flanges		
75-1090	3/4" (20)	\$841	24	(11)
75-1091	1" (25)	\$887	24	(11)
75-1092	1 1/4" (32)	\$1,171	24	(11)
75-1093	1 1/2" (40)	\$1,642	48	(22)
75-1094	2" (50)	\$1,935	48	(22)
75-1095	2 1/2" (65)	\$2,465	76	(34)
75-1096	3" (80)	\$3,486	87	(40)
75-1128	4" (100)	\$5,157	135	(61)



AR3

SMALL PRESSURE REGULATORS

Compact, flanged pressure regulators ideal for pilot application. Frequently used as small relief devices and as remote pilots for main regulators. Standard flange is 1/2" FPT. 3/4" FPT and 1/2", 3/4" SW; WN available 1/4" FPT Gauge Port. Optional close-coupled inlet strainer type **ST050 (D)** pg. 7.

To Order: Specify model, range, connection style and size, and strainer if required. For CO₂ service, contact factory.

Model	Function	Range	List Price	Weight lbs (kg)
HA2B	Back Pressure	A: 0 to 150 psig (0 to +10 bar)	\$530	8 (3.6)
		B: 30 to 300 psig (+2 to +21 bar)	\$530	
		C: 100 to 550 psig (6 to 38 bar)	\$799	
		D: 30 to 450 psig (0 to 31 bar)	\$530	
		V: 20" to 130 psig (-0.67 to +9 bar)	\$814	
HA2A	Back Pressure (high capacity)	A: 0 to 150 psig (0 to +10 bar)	\$669	9 (4.1)
		B: 30 to 300 psig (+2 to +21 bar)	\$669	
		C: 100 to 550 psig (6 to 38 bar)	\$937	
		D: 30 to 450 psig (0 to 31 bar)	\$669	
HA2BK	Relief	A: 0 to 150 psig (0 to +10 bar)	\$640	8 (3.6)
		B: 30 to 300 psig (+2 to +21 bar)	\$640	
		C: 100 to 550 psig (6 to 38 bar)	\$907	
		D: 30 to 450 psig (0 to 31 bar)	\$640	
		V: 20" to 130 psig (-0.67 to +9 bar)	\$924	
HA2BO	Outlet	V: 20" to 130 psig (-0.67 to +9 bar) B: 30 to 300 psig (+2 to +21 bar)	\$1,039	9 (4.1)
HA2BL	Differential	A: 0 to 150 psig (0 to +10 bar)	\$868	8 (3.6)
HA2BP	Pneumatic	A: 0 to 150 psig (0 to +10 bar)	\$697	8 (3.6)
HA2BM	Motor**	A: 0 to 150 psig (0 to +10 bar) (less motor)	\$2,129	12 (5.4)



HA2A

** See page 9 for motor and controller options.

HCK2/HCK2W GAS-POWERED SUCTION STOP VALVES

Flanged and Weld-in

Heavy duty, flanged and weld-in, gas-powered suction stop valves. Gas power to close, internal bleed to open. Rugged ductile iron body. 1/2" SW (FPT on request) flange union with internal disc strainer included. 5" and 6" (125 and 150 mm) are integral butt weld end only.

To Order: Specify model, port size, pilot solenoid and strainer if applicable, voltage and connection size and style.



HCK2

Model	Port Size inch (mm)	Connections Available Flange Styles and Sizes			List Price						Weight lbs (kg) Complete with Pilot & Flanges	
		FPT, SW, WN (DN) ODS (DN/ODS)			Less Pilot Solenoid			Add Pilot Solenoid				
		Standard	Also		FPT,SW	WN,ODS	Weld-In**	Without Strainer	* With Strainer	Model		
HCK2 HCK2W	1 1/4" (32)	1 1/4" (32)	1 1/2" WN*** (40)		\$1,140	\$1,180	—	\$534	\$680	HS6	22 (10)	
	1 1/2" (40)	1 1/2" (40)	2" (50)		\$1,477	\$1,519	\$1,802				46 (21)	
	2" (50)	2" (50)	1 1/2" (40)		\$1,566	\$1,608	\$1,940				46 (21)	
		2 1/2" (65)	2 1/2" (65)	3" (80)		\$2,166	\$2,225	\$2,655	\$655	\$801	HS8A	78 (35)
		3" (80)	3" (80)	—		\$2,735	\$2,846	\$3,390				90 (41)
		4" (100)	4" (100)	—		\$4,151	\$4,319	\$4,972				142 (64)
		5" (125)	5" BW (125)	—		—	—	\$7,925				250 (113)
		6" (150)	6" BW (150)	—		—	—	\$12,553	270 (122)			

* Optional weld-in pilot solenoid, **Type HS8W with integral strainer, pg. 4.**

** Weld-in connection type 1 1/2" to 2 1/2" (40 to 65 mm) SW, 3" to 6" (80 to 150 mm) BW, add 'W' suffix, i.e. HCK2W.

***1-1/2" WN Flanges List Extra \$278

HS9B/HS9BW GAS-POWERED SOLENOID VALVES

Flanged and Weld-in

Solenoid exhaust to open, solenoid gas power to close (with dual pilot solenoid valves). Rugged, ductile iron body. 1/2" SW (FPT on request) flange union with an internal disc strainer is included. 5" and 6" (125 and 150 mm) are integral butt weld end only. Pilot solenoid valves provided in prepiped assembly, including standard coils with 18" wire leads.

To Order: Specify model, port size, voltage and connection size and style.

Note: Pilot valve assembly direct weld-in available upon request. Pilot valve assembly is flanged.



HS9B

Model	Port Size inch (mm)	Connections Available Flange Styles and Sizes			List Price				Weight lbs (kg) Complete with Pilots & Flanges
		FPT, SW, WN (DN) ODS (DN/ODS)			With 2 Pilot Solenoid Valve Assembly				
		Standard	Also	Pilot Line FPT	FPT, SW	WN, ODS	Weld-In*		
HS9B HS9BW	1 1/4" (32)	1 1/4" (32)	1 1/2" WN** (40)	1/2"	\$2,946	\$2,986	—	29 (13)	
	1 1/2" (40)	1 1/2" (40)	2" (50)	1/2"	\$3,258	\$3,300	\$5,239	53 (24)	
	2" (50)	2" (50)	1 1/2" (40)	1/2"	\$3,299	\$3,341	\$5,578	53 (24)	
	2 1/2" (65)	2 1/2" (65)	3" (80)	1/2"	\$4,113	\$4,172	\$6,128	84 (38)	
	3" (80)	3" (80)	—	1/2"	\$5,006	\$5,117	\$6,691	96 (44)	
	4" (100)	4" (100)	—	1/2"	\$6,641	\$6,809	\$7,979	148 (67)	
	5" (125)	5" BW (125)	—	1/2"	—	—	\$12,789	259 (117)	
	6" (150)	6" BW (150)	—	1/2"	—	—	\$17,076	279 (126)	

* Weld-in connection type 1 1/2" to 2 1/2" (32 to 65 mm) SW, 3" to 6" (80 to 150 mm) BW.

**1-1/2" WN Flanges List Extra \$278

Simple – Safe – Reliable

HCK5D/HCK5DW GAS-POWERED TWO STEP SUCTION STOP VALVES

Flanged and Weld-in

Heavy duty, flanged or weld-in, gas-powered two step suction stop valves. Self-equalizing with a delayed opening feature after defrost or power failure. Internal, controlled bleed down piston design. 1/2" SW (FPT on request) flange union with internal disc strainer included.

To Order: Specify model, port size, voltage and connection size and style.



HCK5D

NOW AVAILABLE IN MVP (see page 3)

Model	Port Size inch (mm)	Connections Available Flange Styles and Sizes		List Price						Weight lbs (kg) Complete with Pilot & Flanges
		FPT, SW, WN (DN) ODS (DN/ODS)		Less Pilot Solenoid			Add Pilot Solenoid			
		Standard	Also	FPT,SW	WN,ODS	Weld-In**	Without Strainer	* With Strainer	Model	
HCK5D HCK5DW	1 1/2" (40)	1 1/2" (40)	2" (50)	\$2,489	\$2,531	\$2,830				59 (27)
	2" (50)	2" (50)	1 1/2" (40)	\$2,576	\$2,618	\$2,974				59 (27)
	2 1/2" (65)	2 1/2" (65)	3" (80)	\$3,162	\$3,221	\$3,672	\$655	\$801	HS8A	91 (41)
	3" (80)	3" (80)	—	\$3,699	\$3,810	\$4,372				103 (47)
	4" (100)	4" (100)	—	\$5,478	\$5,646	\$6,316				155 (70)


* Optional weld-in pilot solenoid, **Type HS8W with integral strainer, List Each pg. 4.**

** Weld-in connection type 1 1/2" to 2 1/2" (40 to 65 mm) SW, 3" to 4" (80 to 100 mm) BW, add 'W' suffix, i.e. HCK5DW.

NOW AVAILABLE - 52 BAR SWP (750 PSIG)

Model	Port Size inch (mm)	List Price		Weight lbs (kg)
		Connection Type		
		Weld-In (SW)	Weld-In (BW)	
CHCK5DW	1 1/2" (40)	\$3,031	\$3,031	34 (15)
	2" (50)	\$3,186	\$3,186	34 (15)
	2 1/2" (65)	\$3,962	\$3,962	53 (24)
	3" (80)	N/A	\$4,696	62 (28)

NEW!




HCK5W GAS-POWERED SUCTION STOP VALVES

Weld-In

HCK5W Suction Stop Valves are available having delayed opening in case of power failure. A pressure pilot gradually bleeds down evaporator pressure to a safe differential. Pressure and solenoid pilots provided in prepiped 3/4" FPT flanged assembly.

To Order: Specify model, port size, voltage and connection size and style.

Model	Port Size inch (mm)	Connections Available Flange Styles and Sizes		List Price			Weight lbs (kg) Complete with Pilot & Flanges
		FPT, SW, WN (DN), ODS		With Pilot Assembly			
		Standard	Also	FPT,SW	WN,ODS	Weld-In	
HCK5W	5" (125)	5"BW (125)	—	—	—	\$9,291	263 (119)
	6" (150)	6"BW (150)	—	—	—	\$13,917	283 (128)

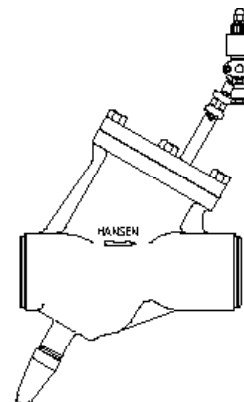

HCK5W

HCK4 IN-LINE CHECK VALVES

Flanged

Compact, flanged, in-line (non-return) check valves open wide for flow in arrow direction on body, valves close when pressure reversals occur. Seat discs and springs are stainless steel.

HCK4LR Gravity Drain Low Pressure Drop

The HCK4LR series of in-line gravity drain check valves are dependable, compact and rugged. The HCK4LR gravity drain check valves feature a low wide-opening pressure differential suitable for liquid transfer systems and other low pressure drop applications. Available in 2", 3" and 4" (50, 80, and 100 mm); add suffix "LR" to model.

Kits available with spacer for direct replacement of Wolf-Linde/H.A. Phillips:

3" (80 mm) Replacement Kit, Part No. 72-1001, Contact Factory

4" (100 mm) Replacement Kit, Part No. 72-1002, Contact Factory

To Order: Specify model, flange connection style and size. For CO₂ service, contact factory; UL Listed.



HCK4

Model	Port Size inch (mm)	List Price			Weight lbs (kg)
		FPT, SW	WN, ODS	Less Flanges w/Adapter†	
HCK4-2	5/8" (16)	\$280	\$316	\$242	2 (0.9)
HCK4-3	3/4" (20)	\$314	\$354	\$262	5 (2.3)
HCK4-4	1" (25)	\$391	\$431	\$339	5 (2.3)
HCK4-5*	1 1/4" (32)	\$519	\$559	\$467	5 (2.3)
HCK4-7	1 1/2" (40)	\$687	\$729	\$594	14 (6.4)
HCK4-8	2" (50)	\$768	\$810	\$675	15 (6.8)
HCK4-9	2 1/2" (65)	\$1,127	\$1,186	\$924	26 (12)
HCK4-0	3" (80)	\$1,449	\$1,560	\$1,210	27 (12)
HCK4-1	4" (100)	\$2,330	\$2,498	\$1,957	35 (16)
HCK4-8LR	2" (50)	\$768	\$810	—	15 (6.8)
HCK4-0LR	3" (80)	\$1,449	\$1,560	—	27 (12)
HCK4-1LR	4" (100)	\$2,330	\$2,498	—	35 (16)

† Adapter ring MAR needed for close-coupling to valves. Special loaded check valves for defrost condensate float drain applications are available, specify model HCK4-2-10, HCK4-2-18 or HCK4-2-30 (used with liquid drainer HD101, see page 27).

* 1 1/4" is standard 2-bolt flange design; HCK4-6 4-bolt flange style available to replace 1 1/4" R/S, contact factory.


HCK1/HCK1W PISTON TYPE CHECK VALVES

Flanged and Weld-in

Heavy duty, piston type check valves control the flow of refrigerant, and compressor discharge. Valves open wide for flow in arrow direction on valve body and close when flow reversals occur.

The HCK1 is suitable for compressor or pump discharge, hot gas lines and pulsating pressure applications. Contact factory for Screw Compressor Side Port Applications. Suitable for Ammonia, R-22, R-134a, and other approved refrigerants.

To Order: Specify model, flange connection style and size.



HCK1

Model	Port Size inch (mm)	List Price		Weld-In*	Weight lbs (kg)
		FPT, SW	WN, ODS		
HCK1 HCK1W	3/4" (20)	\$652	\$692	\$863	20 (9)
	1" (25)	\$686	\$726	\$944	20 (9)
	1 1/4" (32)	\$983	\$1,023	\$1,280	20 (9)
	1 1/2" (40)	\$1,283	\$1,325	\$1,605	44 (20)
	2" (50)	\$1,374	\$1,416	\$1,748	44 (20)
	2 1/2" (65)	\$1,770	\$1,829	\$2,254	76 (35)
	3" (80)	\$2,445	\$2,556	\$3,093	88 (40)
	4" (100)	\$3,772	\$3,940	\$4,578	146 (66)
	5" (125)	—	—	\$6,909	250 (113)
6" (150)	—	—	\$11,476	270 (122)	

* Weld-in connection type 3/4" to 2 1/2" (20 to 65 mm) SW, 3" to 6" (80 to 150 mm) BW.

COMBINATION STOP/CHECK VALVES

Socket Weld and Butt Weld

Durable, carbon-steel-bodied valves are a combination stop valve and normally-spring-closed check valve. Valves open wide for full flow in the arrow direction on the valve body and promptly reseal when reverse flow occurs. Stainless steel valve stems facilitate positive manual closing while Teflon disc seats assure reliable, long-life seating. Use of these combination valves reduces pressure drop, minimizes space requirements, and simplifies installation. Angle body is standard. Straight through bodied valves available on special order; contact factory. Handwheels also available.

To Order: Specify catalog number. Check valve capacity prior to ordering, line sizing is not recommended.

Catalog Number		Port Size inch (mm)	List Price	Weight lbs (kg)
Socket Weld	HCK125C	1¼" (32)	\$864	7 (3.2)
	HCK150C	1½" (40)	\$933	8 (3.6)
	HCK200C	2" (50)	\$1,289	12 (5.4)
Butt Weld	HCK250C	2½" (65)	\$1,773	21 (9.5)
	HCK300C	3" (80)	\$2,284	29 (13)
	HCK400C	4" (100)	\$2,941	44 (20)
	HCK500C	5" (125)	\$4,677	65 (29)
	HCK600C	6" (150)	\$5,910	82 (37)




HCK200C

LIQUID DRAIN BALL VALVES

Spring return ball valves available with carbon steel or stainless steel valve bodies.

To Order: Specify catalog number.

Catalog Number		Size inch (mm)	List Price	Weight lbs (kg)
Carbon Steel	50-2644	½" (13)	\$580	1.3 (0.6)
	50-2645	¾" (20)	\$689	2.0 (0.9)
	50-2646	1" (25)	\$766	2.3 (1.0)
Stainless Steel	50-2647	½" (13)	\$618	1.3 (0.6)
	50-2648	¾" (20)	\$764	2.0 (0.9)
	50-2649	1" (25)	\$973	2.3 (1.0)



Liquid Drain Ball Valve

SHUT-OFF VALVES

(For Ammonia, Halocarbons, CO₂)

Rugged shut-off valves are a strong, reliable component for modern industrial refrigeration applications and suitable for liquid, suction, hot gas, discharge, recirculating liquid or oil lines.

Screwed Bonnet Threaded Valves feature non-leak stainless steel stems, and ductile iron bodies. Threaded, Socket Weld and Butt Weld Bolted Bonnet Valves feature large bonnet bolts for exceptional strength, non-leak stainless steel stems, and forged steel or low temperature cast steel bodies.

To Order: Specify model. For CO₂ service, contact factory for pricing.

CE Mark for 1 1/4" (32 mm) and larger; **10% List Extra.**

5/8" thru 4-1/8" ODS angle valves available, **20% List Extra.**



GSB076H

AW200C

Size inch (mm)	End Connection	Globe		Angle		List Prices		Weight lbs (kg)	
		Handwheel	Seal Cap	Handwheel	Seal Cap	Globe	Angle	Globe	Angle
3/8" (10)	Thrd/Scrw'd Bonnet	GT038H	GT038C	AT038H	AT038C	\$213	\$213	3 (1.4)	3 (1.4)
1/2" (13)	Thrd/Scrw'd Bonnet	GT051H	GT051C	AT051H	AT051C	\$218	\$218	3 (1.4)	3 (1.4)
	Threaded	GTB051H	GTB051C	ATB050H	ATB050C	\$252	\$252	5 (2.3)	5 (2.3)
	Socket Weld	GSB051H	GSB051C	ASB050H	ASB050C	\$254	\$254	5 (2.3)	5 (2.3)
	Butt Weld	GWB051H	GWB051C	AWB050H	AWB050C	\$278	\$278	5 (2.3)	5 (2.3)
3/4" (20)	Thrd/Scrw'd Bonnet	GT076H	GT076C	AT076H	AT076C	\$249	\$249	3 (1.4)	3 (1.4)
	Threaded	GTB076H	GTB076C	ATB075H	ATB075C	\$300	\$300	5 (2.3)	5 (2.3)
	Socket Weld	GSB076H	GSB076C	ASB075H	ASB075C	\$301	\$301	5 (2.3)	5 (2.3)
	Butt Weld	GWB076H	GWB076C	AWB075H	AWB075C	\$327	\$327	5 (2.3)	5 (2.3)
1" (25)	Threaded	GTB101H	GTB101C	ATB100H	ATB100C	\$314	\$314	6 (2.7)	6 (2.7)
	Socket Weld	GSB101H	GSB101C	ASB100H	ASB100C	\$317	\$317	6 (2.7)	6 (2.7)
	Butt Weld	GWB101H	GWB101C	AWB100H	AWB100C	\$343	\$343	6 (2.7)	6 (2.7)
1-1/4" (32)	Threaded	GTB126H	GTB126C	ATB125H	ATB125C	\$435	\$435	6 (2.7)	6 (2.7)
	Socket Weld	GSB126H	GSB126C	ASB125H	ASB125C	\$435	\$435	6 (2.7)	6 (2.7)
	Butt Weld	GWB126H	GWB126C	AWB125H	AWB125C	\$477	\$477	6 (2.7)	6 (2.7)
1-1/2" (40)	Socket Weld	GS150H	GS150C	AS150H	AS150C	\$584	\$584	20 (9)	15 (6.8)
	Butt Weld	GW150H	GW150C	AW150H	AW150C	\$620	\$620	20 (9)	15 (6.8)
2" (50)	Socket Weld	GS200H	GS200C	AS200H	AS200C	\$672	\$672	21 (9.5)	16 (7.2)
	Butt Weld	GW200H	GW200C	AW200H	AW200C	\$696	\$696	21 (9.5)	16 (7.2)
2-1/2" (65)	Socket Weld	GS251H	GS251C	AS251H	AS251C	\$901	\$901	40 (18)	25 (11)
	Butt Weld	GW251H	GW251C	AW251H	AW251C	\$925	\$925	40 (18)	25 (11)
3" (80)	Butt Weld	GW301H	GW301C	AW301H	AW301C	\$1,337	\$1,337	41 (19)	26 (12)
4" (100)	Butt Weld	GW402H	GW402C	AW402H	AW402C	\$1,729	\$1,729	50 (23)	43 (20)
5" (125)	Butt Weld	GW500H	GW500C	AW500H	AW500C	\$3,146	\$2,917	79 (37)	64 (29)
6" (150)	Butt Weld	GW600H	GW600C	AW600H	AW600C	\$3,642	\$3,373	108 (49)	88 (40)
8" (200)	Butt Weld	GW800H	GW800C	AW800H	AW800C	\$7,716	\$7,146	249 (113)	196 (89)
10" (250)	Butt Weld	GW1000H	GW1000C	AW1000H	AW1000C	\$16,385	\$15,170	379 (172)	312 (142)
12" (300)	Butt Weld	GW1200H	GW1200C	AW1200H	AW1200C	\$23,877	\$22,118	703 (320)	583 (265)
14" (350)	Butt Weld	GW1400H	GW1400C	AW1400H	AW1400C	\$47,911	\$44,342	895 (407)	718 (326)
16" (400)	Butt Weld	-	-	AW1600H	AW1600C	-	\$61,319	-	1037 (470)
18" (450)	Butt Weld	-	-	AW1800H	AW1800C	-	\$74,460	-	1216 (553)

*Note: 1" and 1-1/4" Threaded/Screwed Bonnet Valves were obsoleted in June 2013.

HAND EXPANSION VALVES

(For Ammonia, Halocarbons, CO₂)

Precision-calibrated, adjustable, slotted plug flow regulating Hand Expansion Valves are ideal for metering or flashing expansion of liquid refrigerants. Featuring slotted plugs for linear flow regulation along with Teflon seat discs for tight closing. Slotted plugs increase accuracy and are more tolerant of dirt particles than metal-seated tapered-plug expansion valves.

Valve stems are stainless steel and have double seals to eliminate stem leakage. The patented non-leak seal plus packing design permits low torque operation for valve adjustments since the packing nut requires little tightening. Bar handle or yellow seal caps distinguish these regulators from shut-off valves.

To Order: Specify model. For CO₂ service, contact factory for pricing.

CE Mark for 1 1/4" (32 mm) and larger, **10% List Extra.**

5/8" thru 4-1/8" ODS angle valves available, **20% List Extra.**



RSB076H
SOCKET WELD

VSB125C
SOCKET WELD

Size inch (mm)	End Connection	Globe		Angle		List Prices		Weight lbs (kg)	
		Bar Handle	Seal Cap	Bar Handle	Seal Cap	Globe	Angle	Globe	Angle
3/8" (10)	Thrd, Scrwd Bonnet	RT038H	RT038C	VT038H	VT038C	\$223	\$223	3 (1.4)	3 (1.4)
1/2" (13)	Thrd, Scrwd Bonnet	RT051H	RT051C	VT051H	VT051C	\$230	\$230	3 (1.4)	3 (1.4)
	Threaded	RTB051H	RTB051C	VTB050H	VTB050C	\$263	\$263	5 (2.3)	5 (2.3)
	Socket Weld	RSB051H	RSB051C	VSB050H	VSB050C	\$269	\$269	5 (2.3)	5 (2.3)
	Butt Weld	RWB051H	RWB051C	VWB050H	VWB050C	\$290	\$290	5 (2.3)	5 (2.3)
3/4" (20)	Thrd, Scrwd Bonnet	RT076H	RT076C	VT076H	VT076C	\$258	\$258	3 (1.4)	3 (1.4)
	Threaded	RTB076H	RTB076C	VTB075H	VTB075C	\$295	\$295	5 (2.3)	5 (2.3)
	Socket Weld	RSB076H	RSB076C	VSB075H	VSB075C	\$301	\$301	5 (2.3)	5 (2.3)
	Butt Weld	RWB076H	RWB076C	VWB075H	VWB075C	\$316	\$316	5 (2.3)	5 (2.3)
1" (25)	Threaded	RTB101H	RTB101C	VTB100H	VTB100C	\$348	\$348	6 (2.7)	6 (2.7)
	Socket Weld	RSB101H	RSB101C	VSB100H	VSB100C	\$352	\$352	6 (2.7)	6 (2.7)
	Butt Weld	RWB101H	RWB101C	VWB100H	VWB100C	\$376	\$376	6 (2.7)	6 (2.7)
1-1/4" (32)	Threaded	RTB126H	RTB126C	VTB125H	VTB125C	\$439	\$439	6 (2.7)	6 (2.7)
	Socket Weld	RSB126H	RSB126C	VSB125H	VSB125C	\$439	\$439	6 (2.7)	6 (2.7)
	Butt Weld	RWB126H	RWB126C	VWB125H	VWB125C	\$483	\$483	6 (2.7)	6 (2.7)
1-1/2" (40)	Socket Weld	RS150H	RS150C	VS150H	VS150C	\$670	\$670	20 (9)	15 (6.8)
	Butt Weld	RW150H	RW150C	VW150H	VW150C	\$756	\$756	20 (9)	15 (6.8)
2" (50)	Socket Weld	RS200H	RS200C	VS200H	VS200C	\$759	\$759	21 (9.5)	16 (7.2)
	Butt Weld	RW201H	RW201C	VW201H	VW201C	\$788	\$788	21 (9.5)	16 (7.2)
2-1/2" (65)	Butt Weld	RW251H	RW251C	VW251H	VW251C	\$1,219	\$1,219	40 (18)	25 (11)
3" (80)	Butt Weld	RW301H	RW301C	VW301H	VW301C	\$1,645	\$1,645	41 (19)	26 (12)
4" (100)	Butt Weld	RW402H	RW402C	VW402H	VW402C	\$2,125	\$2,125	50 (23)	43 (20)

*Note: 1" and 1-1/4" Threaded/Screwed Bonnet Valves were obsoleted in June 2013.

SHUT-OFF AND HAND EXPANSION VALVES: EXTENDED NECK

Extended Neck Shut-off and Hand Expansion Valves are available with bolted bonnet design, 316 stainless steel stem and packing nut.

Extended Neck valves meet or exceed the insulation thickness recommended in IAR Piping Handbook. Contact factory for pricing.

PRESSURE RELIEF VALVES

Designed to provide emergency relief from excessive pressure in refrigerant containing vessels. Built in strict conformance with ASME Boiler and Pressure Vessel Code requirements for safety relief devices. Each valve bears the ASME code symbol of certification (UV). Capacities are rated by the National Board of Boiler and Pressure Vessel Inspectors. All pressure relief valves feature an installation date tag.

Reduced Capacity


Reduced capacity pressure relief valves meet discharge line sizing requirements; pressure drop through the Hansen three-way dual manifold valve is less than 3% of the pressure setting. Green date tag indicates reduced capacity valve. Add "R" suffix to model number.

To Order: Specify model number, inlet/outlet connection size and pressure setting. For CO₂ service, contact factory. **Setting Certificate, access to electronic version of setting certificate now included; see Hantech.com.** For Pop-Eye Insight, add "PI" suffix to model number (i.e. H5600R-PI)



H5600R

Model	Connections		List Price		Weight	
	Bottom Inlet	Side Outlet	Pop-Eye	Pop-Eye Insight	lbs	(kg)
H5600A	½" FPT	¾" FPT	\$575	\$989	4	(1.8)
H5601	½" FPT	1" FPT	\$579	\$993	4	(1.8)
H5602	¾" FPT	1" FPT	\$693	\$1,107	4	(1.8)
H5613	1" FPT	1¼" FPT	\$982	\$1,396	8	(3.6)
H5604	1¼" FPT	1½" FPT	\$1,566	\$1,980	8	(3.6)
Reduced Capacity Pressure Relief Valves						
H5600R	½" FPT	¾" FPT	\$575	\$989	4	(1.8)
H5602R	¾" FPT	1" FPT	\$693	\$1,107	4	(1.8)
H5632R	¾" FPT	1" FPT	\$693	\$1,107	4	(1.8)
H5633R	1" FPT	1¼" FPT	\$982	\$1,396	8	(3.6)
H5634R	1¼" FPT	1½" FPT	\$1,566	\$1,980	8	(3.6)



POP-EYE™ INSIGHT

Now available for remote
monitoring/alarm and
calculating release amount

H5600R-PI

Note: Dual Pressure Relief Kits are no longer available as of 2023. To accomplish similar configuration, please order two relief valves and one Three-way Dual Shut-off Valves. Standard pressure settings: 150,175, 200, 225, 250*, 275, 300*, 325, 350 psig. 400 psig (27.6 bar g) available for all models except H5601 and H5602. (*Stock pressure settings.). Minimum pressure setting is 150 psig. For halocarbon systems, rupture disc assemblies are required; see below.

THREE-WAY DUAL SHUT-OFF VALVES

For parallel installation of pressure relief valves in accordance with ANSI/ASHRAE 15-2007 Safety Code for Mechanical Refrigeration (pressure vessels having 10 cubic feet or more of internal gross volume, shall be fitted with dual pressure relief valves). Considered the only acceptable type of shut-off valve for use with refrigerant relief piping because one valve remains operational, while the other is being replaced; thereby eliminating the need to remove refrigerant from the vessel. UPDATED NOTE: 600 PSIG SWP

To Order: Specify model number and connection size.

Model*	Size	List Price		Weight lbs (kg)	
		FPT	SW, BW		
		Standard	Standard		
H8021	½"	\$389	\$467	3	(1.3)
H8022	¾"	\$408	\$486	3	(1.3)
H8024	1"	\$645	\$771	10	(4.5)
H8025	1¼"	\$897	\$1,077	10	(4.5)



H8021

* Standard Inlet and outlet connections are threaded female NPT all the same size. Add "S" suffix (socket weld) or "W" suffix (butt weld) to model number, ie H8021S, H8022W

RUPTURE DISC ASSEMBLY

Relief device used in series with a pressure relief valve. Two 1/8" FPT side ports are provided for installation of a pressure gauge or switch to indicate a discharge. For halocarbon systems, rupture disc assemblies are required; see below.

To Order: Specify model number, pressure setting (150, 250, 300, 350 or 400* psi), and optional pressure gauge or pressure switch. *400 psi available for RDA1 and RDA2 only.

1/8" MPT Pressure Gauge, **HG25: List Price \$153.** MPT Pressure Switch, **HPS: List Price \$618.**

Stamped capacity of relief valve when installed with rupture disc device between the inlet of the valve and the vessel shall be multiplied by a factor 0.90 of the rated relieving capacity of the relief valve alone.

Model	Connection Size MPT x MPT	List Price			Weight lbs (kg)
		150, 250, 300 PSIG	350 PSIG	400 PSIG	
RDA1	½" MPT x MPT	\$771	\$1,540	\$1,540	1 (0.5)
RDA2	¾" MPT x MPT	\$991	\$1,980	\$5,175	2 (0.9)
RDA4A	1" MPT x FPT	\$1,347	\$2,245	—	2 (0.9)
RDA5A	1¼" MPT x FPT	\$1,418	\$2,590	—	3 (1.4)



Three Way Dual Relief Valve with Rupture Disc Assembly and Pressure Gauges

EZ-SRV™ CARTRIDGE RELIEF VALVES

Designed to provide emergency relief from excessive pressure in refrigerant containing vessels. These valves are built in strict conformance with both ASME Boiler and Pressure Vessel Code requirements and ISO 4126 – Safety Devices for Protection of Excessive Pressure. Each valve bears the ASME code symbol of certification (UV), and features an installation date tag. Valve capacities are rated by the National Board of Boiler and Pressure Vessel Inspectors (NB).

EZ-SRV™ cartridge valves offer the same reduced capacities as Hansen H5600 “R” series relief valves. The revolutionary cartridge design allows for quick, easy replacement with no need to disconnect from the relief piping. The EZ-Fitting is available with welded or threaded end connections. EZ-Fittings have a built-in 1/4” NPT gauge port connection to facilitate safer and controlled servicing. A 1/4” MPTxFPT gauge valve such as the H7771 can be installed in gauge port to facilitate servicing. The optional HG27 compact gauge has two pressure needles. The black needle shows current pressure and the red tell-tale needle shows highest pressure seen by gauge.



EZ-SRV™ Cartridge Relief Valve shown with EZ-Fitting

OPTIONAL ACCESSORIES

HG27 Gauge, 2” Face, Tell-tale needle 0-600 psi. 1/4” MPT; List \$215

H7771 Angle Gauge Valve, 1/4” MPTxFPT; List pg. 20

Setting Certificate, access to electronic version of setting certificate now included; see Hantech.com



H7771 Gauge Valve shown with HG27 Gauge



EZ-SRV™ Cartridge Relief Valve

REFRIGERANT GAS SERVICE ONLY RELIEF VALVES

CATALOG NUMBER (EZ-SRV + EZ-FITTING)		CONNECTION SIZE		EQUIVALENT H5600 SERIES VALVE	LIST PRICE	REPLACEMENT EZ-SRV CARTRIDGE VALVE ONLY	
THREADED	WELDED	BOTTOM INLET	SIDE OUTLET		SINGLE	CATALOG NUMBER	LIST PRICE
EZB-BT1	EZB-BW1	1/2" (13 MM)	3/4" (20 MM)	H5600R	\$628	EZB	\$418
EZB-BT2	EZB-BW2	3/4" (20 MM)	1" (25 MM)	H5602R	\$733	EZB	\$418
EZC-BT2	EZC-BW2	3/4" (20 MM)	1" (25 MM)	H5632R	\$806	EZC	\$485
EZE-BT4	EZE-BW4	1" (25 MM)	1-1/4" (32 MM)	H5633R	\$1,150	EZE	\$770
EZF-BT5	EZF-BW5	1-1/4" (32 MM)	1-1/2" (40 MM)	H5634R	\$2,124	EZF	\$1,417

*note: dual assemblies are no longer available.

Standard pressure settings are: 150, 175, 200, 225, 250*, 275, 300*, 325, 350, 400, 450, 500, 550, and 600 psig (41 bar g). Except for EZE & EZF (400 psig/28 bar g max).

(*Stock pressure settings.)

To Order: Specify catalog number, pressure setting, optional H7771 Gauge Valve and HG27 Pressure Gauge. For halocarbon applications, a rupture disc assembly is required, see page 18.

REFRIGERANT LIQUID RELIEF VALVES

Hansen offers the EZLQ liquid relief valve, rated U.S. GPM. Typical applications include ASME vessels, oil coolers and other components that can be isolated by control valves or manual shut-off valves.

CATALOG NUMBER (EZ-SRV + EZ-FITTING)		CONNECTION SIZE		LIST PRICE	CAPACITY** GPM - WATER	REPLACEMENT EZ-SRV CARTRIDGE VALVE ONLY	
THREADED	WELDED	BOTTOM INLET	SIDE OUTLET			CATALOG NUMBER	LIST PRICE
EZLQ-BT1	EZLQ-BW1	1/2" (13 MM)	3/4" (20 MM)	\$612	13 GPM@50 PSID 16 GPM@75 PSID 18 GPM@100 PSID	EZLQ	\$403
EZLQ-BT2	EZLQ-BW2	3/4" (20 MM)	1" (25 MM)	\$721			

To Order: Specify catalog number and pressure setting: 50, 75, or 100 psid (3.5, 5.0, or 7.0 bar g).

Per manufacturer’s recommendation, all pressure relief valves (including those that discharge into different parts of refrigeration system) shall be removed and replaced with new valves at least every five years or immediately when an over-pressure event occurs. If an alternate replacement policy is to be considered, such as allowed by IIAR (bench test methodology), justification for this change becomes the sole responsibility of the owner..

GAUGE, PURGE & TRANSDUCER VALVES

Threaded

These specially designed refrigerant gauge, purge and transducer valves feature tough, forged steel bodies, compact size, and polished stainless steel stems. The patented o-ring plus packing dual seal design and polished stainless steel stem virtually eliminates stem seal leakage. Safety stems are designed to be non-removable from the body to avoid dangerous stem “blow out”.

Gauge valves are available with seal caps, bar handles or bare stems. Often used to isolate pressure gauges on regulators and safety relief valves. These valves may also be used for pumpout and purging of refrigerant liquid or gas. The transducer valve makes it easy to calibrate or replace the device without pumping down the system.

To Order: Specify catalog number. If ordering 100 or more of any one model, **Deduct Extra 10%**. Weight 0.6 lb (0.3 kg).



H957H



H7771



HGV1



H9490

Now standard with ACT!

Description	Seal Cap		Bar Handle		Bare Stem	
	Model	List Price	Model	List Price	Model	List Price
1/4" MPT x FPT, Angle, Long Neck [†]	HGV1*	\$139	HGV1H	\$143	HGV2	\$135
1/4" MPT x FPT, Angle	H7771*	\$118	H7771H	\$135	H965	\$113
1/4" FPT x FPT, Angle	H7772	\$127	H7772H	\$136	H967	\$117
1/4" FPT x FPT, Globe	H957C	\$142	H957H	\$144	H957	\$136
3/8" MPT x FPT, Angle	H7773	\$170	H7773H	\$176		
3/8" FPT x FPT, Angle	H7774	\$173	H7774H	\$176		
3/8" FPT x FPT, Globe	H958C	\$169	H958H	\$179		
1/2" MPT x 3/8" FPT, Angle	H7777	\$179				
1/2" MPT x 1/4" FPT, Angle	H7778	\$179				
1/4" MPT x FPT x FPT, Transducer Valve	H9490	\$229				

[†] Long Neck[®] valves provide additional length for insulation and pressure gauge turning clearance.

* HGV1 and H7771, available as welded versions, HGV1W and H7771W. Delivered with butt weld inlet connection; same list price as standard version.

REFRIGERANT FLOAT SWITCHES

Steel tank assembly with combination 3/4" FPT/1" butt weld connections. Standard 2" (50 mm) differential prevents most short cycling due to momentary changes in liquid level; other differentials down to 1/2" (13 mm) are available from stock. Optional switch housing heater is available for preventing moisture penetration in humid environments. CSA certification on HLL and HLLS for Canada. Switch assembly is NEMA4X.

To Order: Specify model number. Standard connection 1/2" fitting with three 18" (450 mm) wire leads. Add "E" suffix for switch with 4 wire, grounded DIN plug connector, Example: HLL. For CO₂ service, consult factory.



HLL

HLL E

Model	Description	List Price	Weight lbs (kg)
HLL	Side & Bottom Connections	\$1,383	12 (5.4)
HLLC	Side & Bottom Connections with Metal Cover	\$1,564	13 (5.9)
E	DIN Plug on Any of Above, Add E Suffix. List Extra.	\$82	1 (0.5)
HLLSW	Switch Assembly Replacement Only, Hermetic	\$730	2 (0.9)
HLLSWE	Switch Assembly Replacement for DIN Plug "E"	\$812	2 (0.9)
COV	Metal Cover Only for All HLL	\$190	1 (0.5)
HTR1*	10 Watt 115V Heater for All HLL	\$371	1 (0.5)
HTR2*	10 Watt 230V Heater for All HLL	\$371	1 (0.5)

* To order float switch with heater, add HTR1 or HTR2, example: HLL/HTR1, 115v.

UL Recognized Component







H1100-R

SEE-LEVEL™ LIQUID INDICATORS

Liquid indicators for simple indication of true liquid levels in industrial and commercial refrigeration systems. Pre-stressed glass lens fused in steel retainer ring. Optional frost shield for clear viewing in frost conditions. Suitable for Ammonia, R-22, R-134a, CO₂ and other approved refrigerants. Housings meet requirements of ASME and PED for direct welding to vessels, receivers, level columns or liquid lines. Each unit marked for material traceability by lot code; certifications available on request. Large diameter Fused Metal reflex lens for easy viewing; clear lens also available. Frost shield length is suitable for temperatures down to -60°F (-51°C). Standard housing can be welded (fillet weld) into a 1.94" / 2" diameter opening or 1 1/2" socket weld fitting, or butt welded to a 1 1/2" pipe (Schedule 80). The scarfed (saddle milled) housing is available for simplified welding over a 1.5" (38 mm) hole, onto 2 1/2", 3", or 4" pipe, such as for level columns or liquid lines. Zinc plating standard.

To Order: Specify model number, and whether material certificate is required. 600 psi (41 bar g) standard rating.

	Model Clear Lens	Description	List Price	Weight lbs (kg)
H1100-R	H1100	 Standard SEE-LEVEL™	\$295	2 (0.9)
H1100-RN	H1100-N	 With Frost Shield	\$353	2 (0.9)
H1100C-R	H1100C	 With Saddle Milled Housing	\$325	2 (0.9)
H1100C-RN	H1100C-N	 With Saddle Milled Housing With Frost Shield	\$382	2 (0.9)

A NEW HANSEN LIQUID LEVEL SENSOR IS HERE



Product features:

- One length for all application requirements
- Used in vessels, receivers or accumulators as well as marine systems
- Suitable for NH3 and HFC refrigerants (R22, R134A, R404A, R410A, R507, R717 & R718)
- Field adjustable length: cut and configure wire from 20 to 157 inches (600 to 4000mm)
- Max pressure up to 1450 psi (100 bar)
- Compact design minimizes shipping costs
- Simple calibration for the length using Hansen website downloadable program
- Electronic head and probe can be separated for service without emptying the vessel
- Standard 4-20mA output signal
- Backward compatible with Hansen VLT and LP models
- Provides direct control of MCV without the need for an intermediate controller (-C model)

HANSEN
TECHNOLOGIES

EMAIL: sales@hantech.com | TOLL FREE: 800.426.7368 | LEARN MORE AT HANTECH.COM

Model	Description	List Price	Weight lbs (kg)
WLT	2-WIRE SENSOR WIRE PROBE 20"-157" REPLACES LP AND VLT	\$2,373	6 (2.5)
WLT-C	3-WIRE SENSOR WIRE PROBE 20"-157" DIRECT MCV CONTROL	\$2,738	6 (2.5)
Options			
LPE	LP EMULATOR KIT (FOR LP REPLACEMENTS)	\$361	1 (0.5)
PSU2	Compact Power Supply (100-240VAC: 24VDC)	\$314	1 (0.5)

To Order: Specify model number and options needed. LPE is needed if the WLT is being controlled by a LB controller. Programming and wiring harness included with the probe.

VARI-LEVEL ADJUSTABLE LEVEL CONTROLS FOR REFRIGERANTS

The Vari-Level® consists of a level probe for a 3" or 4" pipe level column, a control unit for ON-OFF of up to five relay operated level control points: typically, a high alarm/cutout, operating level, and low alarm/cutout (3 points). For Ammonia, R-22, R-134a and other compatible refrigerants. CSA/US Certified and CE Mark standard.

Control Unit

Bright digital LED displays percent level in vessel. Each level control point is adjustable for height and operating differential with a built-in level simulator. Standard electrical input is 115V, 50/60Hz; 230V, 50/60Hz available. Options: 4-20 mA output module, MOD420, available for computer interface or remote digital readout. Mounts inside control unit.

Level Columns

Level Columns are 3" Schedule 40 pipe. Columns include one level sight glass for re-calibration plus high level float switch connections. Top probe connection on column is a 3/4" FPT; connections to vessel are combination 1" FPT / 1 1/4" butt weld. Top or bottom 3/4" FPT level column cap for field level column fabrication using 3" standard pipe: **Part No. 77-1053, List \$107.**

Note: Use Technical Equipment Discount Schedule.



LB3

Control Unit Less Probe				Weight lbs (kg)
Model	# of Relays	Control Points (Typical)	List Price	
LB1	1	Operating Level	\$1,884	10 (5)
LB2	2	Operating and Low Level	\$2,076	10 (5)
LB3	3	Operating, Low and High Level	\$2,258	10 (5)
LB5	5	Operating (2), Low Level (2), and High Level	\$2,858	10 (5)

Level Column		
Model	List Price	Weight† lbs (kg)
LC-02	\$989	38 (17)
LC-03	\$1,023	50 (23)
LC-04	\$1,080	61 (28)
LC-06	\$1,438	80 (36)
LC-08	\$1,601	97 (44)
LC-10	\$1,795	115 (52)
LC-12	\$2,106	145 (66)

†Weight includes level columns packed in crates. (Shipping Weight).

RECEIVER LEVEL TRANSDUCER PROBES

(For Halocarbon Systems, especially Supermarkets)

Designed to be inserted directly into refrigerant receivers and facilitate the continuous measurement of refrigerant liquid levels. The following results can be tracked: refrigerant loss detection, refrigerant inventory measurements, warnings of excessive refrigerant levels, and insufficient refrigerant quantity.

Factory pre-calibrated and tested with no moving parts to break, jam, or fail.

Horizontal Receiver Probes (SHP) can also be used in short [less than 30" (762 mm) insertion] vertical receivers.

For vertical receivers 12" to 20" (305 to 508 mm) diameter (other diameters need special engineering). Maximum insertion length is 69" (1752 mm).

Output signal 0-5V, 0-10V, or 1-6V.

Optional, 3-wire 4-20 mA output available, Model SHA or SVA, **Contact Factory**.

To Order: Specify model number; insertion length; refrigerant; and receiver diameter. Standard connection (3/4" NPT) or Rotalock connection (1 1/4"-12") available. Custom probe lengths available; nonreturnable.

For applications where refrigerant liquid temperature is below 32°F (0°C), use Techni-Level™ or Vari-Level level probes. Heavy-Duty construction is available for liquid temperatures below 50°F to 32°F, Model SSHP or SSVF, **Contact factory**

Note: Use Technical Equipment Discount Schedule.



SHP

SVP

For Horizontal Receivers, Standard Connection		
Model	Insertion Length inch (mm)	List Price
SHP06	6" (152)	\$1,204
SHP08	8" (203)	\$1,234
SHP10	10" (254)	\$1,261
SHP12	12" (305)	\$1,293
SHP14	14" (356)	\$1,355
SHP16	15.3" (388)	\$1,385
SHP20	19.2" (487)	\$1,411
SHP24	23.1" (586)	\$1,488
For Vertical Receivers, Standard Connection		
Model	Insertion Length inch (mm)	List Price
SVP30	30" (762)	\$1,283
SVP36	36" (914)	\$1,325
SVP48	48" (1219)	\$1,406
SVP54	54" (1372)	\$1,448
SVP60	60" (1524)	\$1,489
SVP69	69" (1753)	\$1,535

SINGLE POINT LEVEL CONTROLS

Designed to detect the presence of liquid refrigerant at a specific location in receivers/vessels, intercoolers, control pressure receivers, packaged chillers, compressor packages, pump packages, surge drums, and flooded evaporators.

May be used in place of float switches, for high and low level alarms in conjunction with plant computers, PLCs, or shut-off solenoid valves.


The relay output from the SPS level switch is suitable for direct connection to solenoids, alarms, and computers. No moving parts; plug-in electronics. Unaffected by normal splash or oil coating. Watertight NEMA 3R sensor housing. Sensor connection 1/2" MPT.

To Order: Specify model number and refrigerant. Standard connection is 1/2" MPT.

Note: Use Technical Equipment Discount Schedule.



SPL



SPS

Model		Description	List Price
Ammonia	Halocarbon		
SPLN	SPLF	Sensor 24V, 80mA	\$733
SPSN(1)	SPSF(1)	Switch 115V, 10A	\$828
SPSN(2)	SPSF(2)	Switch 230V, 5A	

FROST MASTER® DEFROST CONTROLLERS

Frost Master® defrost controllers (timers) operate various control valves and fan relays to efficiently remove frost and ice accumulation from evaporator surfaces. There are four easy-to-set defrost steps: PUMPOUT, HOT GAS, EQUALIZE, and FAN DELAY. Defrost time and step duration are always visible. ¼" (6.4 mm) spade terminals for optional sensor defrost initiation and termination are provided. Available with 24-Hour or 7-Day Scheduling. SPDT relays, 10 amp switch rating with battery backup and NEMA 4 enclosure (watertight). CSA/NRTL Certified. Weight 4 lbs (1.8 kg).

To Order: Specify model number. The Frost Master® may be ordered less enclosure and with necessary metal mounting plate for panel installation, add "L" suffix to model number. CE Mark not available.

Note: Use Technical Equipment Discount Schedule.



Frost Master® FM-71


FROST MASTER® PLUS

The Frost Master® Plus includes an additional fifth defrost step, SOFT GAS, for individually timed opening of small soft (hot) gas solenoid valve prior to primary, hot gas solenoid valve for evaporator defrosting. Features built-in, adjustable temperature terminate with clamp-on defrosted sensor.

To Order: Specify model number. CE mark not available.

Note: Use Technical Equipment Discount Schedule

Model	Description	List Price	Weight lbs (kg)
FM-11-B	Frost Master® with Enclosure; 24 Hour Clock; 115V 50/60Hz	\$1,516	4 (1.2)
FM-71-B	Frost Master® with Enclosure; 7 Day Clock; 115V 50/60Hz		
FM-01	Frost Master® with Enclosure; Remote Initiate; 115V 50/60Hz		
FM-12-B	Frost Master® with Enclosure; 24 Hour Clock; 230V 50/60Hz		
FM-72-B	Frost Master® with Enclosure; 7 Day Clock; 230V 50/60Hz		
FM-02	Frost Master® with Enclosure; Remote Initiate; 230V 50/60Hz	\$1,909	4 (1.2)
FMP-11-B	Frost Master® Plus with Enclosure; 24 Hour Clock; 115V 50/60Hz		
FMP-71-B	Frost Master® Plus with Enclosure; 7 Day; 115V 50/60Hz		
FMP-01	Frost Master® Plus with Enclosure; Remote Initiate; 115V 50/60Hz		



Remote Initiate Model FM-01

Note: In 2011, Grasslin timeclocks ("B" suffix) became standard; previously, Diehl timeclocks ("A" suffix) were used.


TS2 Temperature Sensor, List \$ 128

HIGH SIDE FLOATS (FLOAT DRAIN REGULATORS)

Ideal for metering high-pressure refrigerant liquid to a lower-pressure vessel without allowing refrigerant gas to pass. Self-contained, requires no pilot valve-to-main valve piping. For individual condenser drain to a single evaporator or to a controlled pressure receiver, condensate removal from heat recovery coil, liquid drain from hot gas defrost main, or defrosting evaporator liquid draining. Each valve is supplied with combination 1" weld / ¾" FPT. Vent/purge and oil drain connections for optional use (½" FPT for HT100 size).

To Order: Specify model number, refrigerant, inlet temperature and pressure, outlet temperature and pressure, and flow rate in tons or lbs/minute (kW or kg/s). For other operating conditions and refrigerants, contact factory.

Note: Use Technical Equipment Discount Schedule.



HT200N

Ammonia		R22		Connections	List Price	Weight	lbs (kg)
Model	+86°F to +10°F (+30°C to -15°C)	Model	+86°F to +10°F (+30°C to -15°C)				
HT100N	20 Tons (70 kW)	HT100F	5.5 Tons (19 kW)	¾" FPT (20mm)/ 1" Weld (25mm)	\$3,080	34	(15)
HT200N	125 Tons (439 kW)	HT200F	33 Tons (116 kW)	1½" Weld (40mm)	\$3,828	71	(32)
HT300N	360 Tons (1266 kW)	HT300F	100 Tons (351 kW)	2" Weld (50mm)	\$5,218	121	(55)

DEFROST CONDENSATE LIQUID DRAINER

Designed for liquid condensate drain of an evaporator during hot gas defrost. Adjustable vent valve bypass.

To Order: Specify model number, refrigerant, inlet temperature and pressure, outlet temperature and pressure, and flow rate in tons or lbs/minute (kW or kg/s).

Note: Limited 100 psid MOPD on HD101. Use Technical Equipment Discount Schedule.

Ammonia		R22		Connections	List Price	Weight lbs (kg)
Model	Capacity	Model	Capacity			
HD101N	42 Tons (147 kW)	HD101F	11 Tons (39 kW)	¾" FPT (20mm)/ 1" Weld (25mm)	\$3434	40 (18)



HD101

NON-ELECTRICAL

PROVEN RELIABILITY

FIELD ADJUSTABLE

PXV/PXVW PULSE WIDTH EXPANSION VALVE

Pulse width modulating liquid refrigerant expansion valve, with a specially designed high cycle, long life solenoid operator. Controller uses a 4-20mA input signal to monitor the liquid flow to the system. The PXVW60 body has an integral 100 mesh (150 micron) strainer screen and direct weld assembly. PXV5 and PXV15 are flange-to-flange drop-in for Sporlan type D thermostatic expansion valve.

To Order: Specify model, connection style and size, coil connection style and voltage. Unless specified, standard coil with 1/2" fitting will be supplied. Contact factory for other refrigerants and capacities.

Flanges available: **1/2" SW Flange, Part No. 20-1520, List \$48.**

Note: Use Technical Equipment Discount Schedule.

Model	Connections Styles and Sizes Available	Capacity Tons of Ammonia	List Price
PXV5	Less Flanges	5 (18 kW)	\$880
PXV15	Less Flanges	15 (53 kW)	\$880
PXVW60	1/2", 3/4" SW 1/2", 3/4", 1" BW	15 to 60 (53 to 212 kW) Adjustable	\$1,050
CONTROLLERS			
PXVC-PT	Superheat/Supercooling Controller (includes TS2 temp sensor; requires PT2 pressure transducer, not included)		\$584
PXVC-DX	DX Controller for PXV, PXVW (HPT not included, see below)		\$461
PXVC-T	Temperature Controller for PXV, PXVW (includes TS1 temp sensor)		\$504
PXVC-L	Level Controller for PXV, PXVW (level sensor not included)		\$461
PXVC-P	Pressure Controller for PXV, PXVW (transducer not included, see PT3 below)		\$461
PXVC-CI	Control Interface Module for PXV, PXVW (4-20mA input, pulse-width output)		\$461
SENSORS			
HPT717	Pressure/Temperature Transducer, NH3, 3/4" NPT		\$1,587
HPT507	Pressure/Temperature Transducer, R-507, 3/4" NPT		\$1,678
HPT134	Pressure/Temperature Transducer, R-134a, 3/4" NPT		\$1,678
PT2	Pressure Transducer, 15" - 85 psig, 4-20mA, 1/4" MPT		\$566
PT3	Pressure Transducer, 15" - 285 psig, 4-20mA (for PXVC-P)		\$1,008
IMW	Immersion Well for above, SS, 4" insert, 1/2" MPT		\$49
ACCESSORIES			
WTE3	Water tight Enclosure (NEMA4), for above controllers		\$230
PSU2	Compact Power Supply (100-240VAC: 24VDC) for above enclosure		\$314
RDR	Optional remote digital readout		\$960
TR40*	AC Transformer 115/230 VAC:24VAC (40 VA), powers PXVC only (75-0718)		\$360
TR92	AC Transformer 115/230VAC:24VAC (92 VA), powers PXVC +24V coil (35-0037)		\$281

* Use Valves & Controls Discount Schedule.



PXV



PXVW60



PXVC

OIL TEMPERATURE VALVES


Three-way valve used to control the oil temperature of screw compressors or other oil-cooling circuits. Suitable for oils operating with ammonia, halocarbons, and other compatible refrigeration systems.

To Order: Specify model number, size, connection style, and temperature setting. For other temperatures, consult factory. CE mark not available for HOTW.

Note: Use Technical Equipment Discount Schedule.



HOTV/HOTW
(1 1/2" & 2")



HOTV
(1", 2 1/2" & 3")

Model	Size	Range					List Price	Weight	
		A	B	D	F	H		lbs	(kg)
HOTV	1" SW		✓	✓		✓	\$1,108	11	(5)
	1 1/2" SW	✓	✓	✓	✓	✓	\$2,098	18	(8)
	2" SW, BW	✓	✓	✓	✓	✓	\$2,324	16	(7)
	2 1/2" SW, BW	✓	✓	✓			\$4,045	48	(22)
	3" BW	✓	✓	✓			\$5,270	48	(22)
HOTW	1 1/2" SW	✓	✓	✓	✓	✓	\$2,098	18	(8)
	2" SW	✓	✓	✓	✓	✓	\$2,324	16	(7)

Temperature Settings

- Range A: 130°F (54°C)
- Range B: Standard 120°F (49°C)
- Range D: 140°F (60°C)
- Range F: 150°F (66°C)
- Range H: 110°F (43°C)

AUTO-PURGER® NONCONDENSIBLE GAS PURGER (For Ammonia Only)

Reduce condensing pressure and lower power costs by removing noncondensable gases such as air in a refrigeration system. The AUTO-PURGER® AP08 allows up to eight locations to be individually purged, AP16 allows up to 16 points, AP24 allows up to 24 points. One AUTO-PURGER® is typically sufficient for a 1500 ton (5275 kW) system [or a 750 ton (2638 kW) system operating below 0 psig (0 bar g)]; same capacity for all refrigerants. Isolation shut-off valve kits with strainers included. Automatic water bubbler flush system eliminates water bottle attention. Water conditioning cartridge is available for hard water supply. Standard electrical supply is 115V/60Hz; 230V/60Hz, 220V/50Hz and 110V/50Hz are available. Canadian CSA certification.



AUTO-PURGER® AP

To Order: Specify model number, refrigerant, and voltage. Note: Use Technical Equipment Discount Schedule.

Welded Construction is standard (“W” Suffix)

Updated control cabinet (as shown) will be available as standard on new AP purger orders received starting in November 2024. This updated purger provides easy-to-use operator interface and remote computer monitoring.

This new control cabinet can also be retrofitted onto existing purgers; contact factory.

Model	Description	List Price	Weight lbs (kg)
AP08W	AUTO-PURGER® Deluxe, 8 Points.	\$28,408	350 (158)
AP16W	AUTO-PURGER® Deluxe, 16 Points.	\$32,433	360 (162)
AP24W	AUTO-PURGER® Deluxe, 24 Points.	\$36,881	370 (167)
APCW	AUTO-PURGER® for Computerized Plants.	\$24,150	340 (153)
AP01W	AUTO-PURGER® Basic, 1 Point (See WBA and INS Options Below).	\$20,506	330 (149)

For Halocarbons, See APMF and NEAPF, Specify Refrigerant.

HS8A-ST*	½" Port Purge Point Solenoid Valve with Strainer. 115V 50/60 Hz, ½" FPT or SW Each.	\$801	6 (2.7)
MVP13-1*	MVP Valve Station (Shut-Off, Strainer, 1/2" Port Solenoid , Shut-Off) 115V 50/60 Hz, ½" SW Each.	\$2,067	16 (7)
Options			
WCH	Water Conditioning Housing for WCC Below, 3/4" FPT. (Doesn't include WCC)	\$477	—
WCC	Water Conditioning Cartridge, Replacement.	\$330	—
WBA	Water Bubbler Flush System Option for AP01W. (Standard on AP08W, AP16W, AP24W, and APCW.)	\$2,370	—
INS	Insulation Option for AP01W. (Standard AP08W, AP16W, AP24W, APCW.)	\$1,649	—
H5600R*	Relief Valve, 1/2" x 3/4" 300 psig.	See Page 18	—
DPS	Differential Pressurestat System to Detect Loss of Foul Gas Pressure (AP only). APW Contact Factory	\$1,495	—
Supplemental Kits			
APPLT	Beacon Pilot Light Kit for AP (4-Green and 2-Amber)	\$428	—

NON-ELECTRIC MINI AUTO-PURGER® NEAP (For Ammonia & Halocarbons)

The Non-Electric Mini AUTO-PURGER® (NEAP) is a simplified version of our well known purgers for packaged units or small plants featuring easy start-up and automatic operation. Suitable for Class I, Division II (Explosion Proof) applications with welded piping construction. One NEAP Purger suitable for smaller ammonia and halocarbon systems to 100 tons (350 kW).

Isolation Valve Package VPM

Optional isolation valve package (VPM) consists of three flanged welded assemblies which include the necessary shut-off valves and gauge valves for the “Foul Gas” line, Suction line and Liquid line. VPMF for halocarbons also includes filter dryers and moisture indicating sight glasses.

To Order: Specify model number and refrigerant. Note: Use Technical Equipment Discount Schedule.



MINI AUTO-PURGER NEAP

Model	Description	List Price	Weight lbs (kg)
NEAP	Mini AUTO-PURGER®, Ammonia	\$10,482	145 (66)
VPM	Valve Package, Ammonia	\$1,576	15 (7)
NEAPF	AUTO-PURGER®, Halocarbons	\$11,138	145 (66)
VPMF	Valve Package, Halocarbons	\$2,464	15 (7)

AUTO-PURGER® APM
(For Ammonia & Halocarbons)

The AUTO-PURGER® M (APM) can purge up to a maximum of four points which makes it ideal for smaller refrigeration plants. Typically, this purger will handle up to a 200 ton (700 kW) ammonia or halocarbon system. It features welded piping construction and comes pre-assembled, pre-wired, tested, insulated, and includes an automatic water bubbler flush system. Standard voltage is 115V 50/60Hz; 230V 50/60Hz is available. CSA and CE mark available.

Isolation Valve Package VPM

Optional isolation valve package (VPM) consists of three flanged welded assemblies which include the necessary shut-off valves and gauge valves for the "Foul Gas" line, Suction line and Liquid line. VPMF for halocarbons also includes filter dryers and moisture indicating sight glasses.

To Order: Specify model number, voltage, and refrigerant.

Note: Use Technical Equipment Discount Schedule.



AUTO-PURGER® APM

Model	Description	List Price	Weight lbs (kg)
APM	AUTO-PURGER® APM, 4 Points, Ammonia	\$16,920	200 (91)
VPM	Valve Package, Ammonia	\$1,576	15 (7)
APMF	AUTO-PURGER® APMF, 4 Points, Halocarbons (R134a, R404A, R507A)	\$17,852	200 (91)
VPMF	Valve Package, Halocarbons	\$2,464	15 (7)
H5600R*	Relief Valve, 1/2" x 3/4" 300 psig.	See Page 18	4 (1.8)
RDA1*	Rupture disc, 1/2" 300 psig. Required for halocarbons system.	See Page 18	1 (0.5)
APMPLT	Beacon Pilot Light Kit for APM (2-Green and 2-Amber)	\$298	—
NEMA 4	Watertight Construction Option. List Extra to Any Above AUTO-PURGER®.	\$727	—
HS8A-ST*	1/2" Port Purge Point Solenoid Valve with Strainer, 115V 50/60 Hz, 1/2" FPT or SW	\$801	6 (2.7)
MVP13-1*	MVP Valve Station (Shut-Off, Strainer, 1/2" Port Solenoid, Shut-Off) 115v 50/60Hz, 1/2" SW	\$2,067	16 (7)

* Use Valves & Controls Discount Schedule for HS8A-ST, MVP13-1, H5600R and RDA1.

AUTO-PURGER® PLUS GAS (AIR) & WATER PURGER
(For Ammonia Only)

AUTO-PURGER® PLUS is a totally automatic, electronically controlled non-condensable gas (air) and water purger for reducing the energy costs of operating an ammonia refrigeration system. Shipped preassembled, prewired, insulated, and includes an automatic water bubbler, a relief valve, and an isolation service valve package. One AUTO-PURGER® is typically sufficient for a 1500 ton (5275 kW) system [or a 750 ton (2638 kW) system operating below 0 psig (0 bar g)]. All models are suitable for ammonia only. Standard electrical supply is single phase, 20A, 115V, 50/60 Hz; 10A, 230V, 50/60 Hz is available. Canadian CSA certification.

AUTO-PURGER® PLUS Technology Package, (now Standard), includes 6" (150mm) color touch screen display, with ethernet connection, alarm history log, with multi-lingual operating instructions. Features built-in troubleshooting guide.

To Order: Specify model number and voltage.



AUTO-PURGER® PLUS


Model	Description	List Price	Weight lbs (kg)
APPT08	AUTO-PURGER® Plus with Technology Package, 8 Points.	\$47,234	410 (186)
APPT16	AUTO-PURGER® Plus with Technology Package, 16 Points.	\$52,173	410 (186)
APPT24	AUTO-PURGER® Plus with Technology Package, 24 Points.	\$57,522	410 (186)
APPTC	AUTO-PURGER® Plus with Technology Package for Computerized Plants.	\$43,317	410 (186)
HS8A-ST*	1/2" Port Purge Point Solenoid Valve with Strainer, 115V 50/60 Hz, 1/2" FPT or SW.	\$801	6 (2.7)
MVP13-1*	MVP Valve Station (Shut-Off, Strainer 1/2" Port Solenoid, Shut-Off) 115v 50/60Hz, 1/2" SW	\$2,067	16 (7)

MCV MOTORIZED CONTROL VALVES

The All NEW, Hansen MCV is a highly reliable and rugged, direct operated Motorized Control Valve. It features the highest rated MOPD and SWP. Valve position is displayed on a forward facing, bright LED readout.

Whether controlling flow, level, temperature or pressure, the MCV Motorized Control Valve provides precise control. A wide variety of control signal options allows the customer flexibility to control the valve by utilizing their own PLC or computer..

- Plug and Play logic for quick and hassle-free installation
- Self Calibrating - Automatic calibration on power - up
- One high-torque motor fits all 3/4" - 4" (20 to 100mm)
- MOPD and Safe Working Pressure (SWP): 800 psig weld-in line or 400 psig flanged
- Various Input Control Signal Choices: 0-20 mA, 4-20 mA, 0-5 V, 0-10 V, 1-6 V, and dry contact
- Power Input: 24V AC or DC, Loss of Power back-up available
- Front facing, bright LED Readout of valve position and 4-20mA feedback output signal
- Fine motor control: 200 steps per revolution

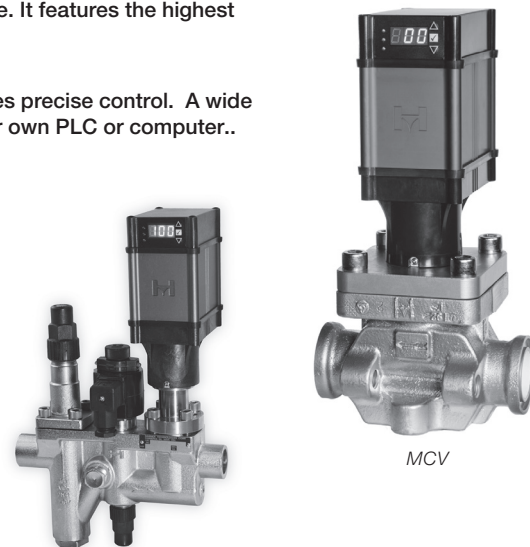

Now Available on MVP13 - MVP100 Multi-Valve Platform, see pages 2 & 3

Nominal Size		Valve Type		Flow Factor (Cv)	List Price		Weight lb (kg)
inch	(mm)	Standard	Weld-in		Flanged	Weld-in	
7/32"	(5)	MCXV/A		0.6			18 (8)
9/32"	(7)	MCXV/B		1.1	\$4,392	—	
1/16"	(2)	MCXV/C		0.2			
3/4"	(20)	MCR20	MCRW20	2.2	\$4,389	\$4,674	18 (8)
		MCV20	MCVW20	6.4			
1"	(25)	MCR25	MCRW25	3.9	\$4,553	\$4,888	
		MCV25	MCVW25	11.7			
1 1/4 "	(32)	MCR32	MCRW32	6.4	\$4,769	\$5,145	
		MCV32	MCVW32	16.4			
1 1/2 "	(40)	MCR40	MCRW40	12	\$5,183	\$5,592	36 (16)
		MCV40	MCVW40	35			
2 "	(50)	MCR50	MCRW50	16	\$5,402	\$5,863	
		MCV50	MCVW50	47			
3"	(80)	MCR80	MCRW80	35	\$7,458	\$8,219	75 (34)
		MCV80	MCVW80	104			
4"	(100)	MCR100	MCRW100	47	\$9,708	\$10,527	123 (56)
		MCV100	MCVW100	166			

To Order: MCR / MCV: Specify valve type, nominal size, connection style and size (3/4", 1", 1-1/4" FPT /SW, 1-1/2", 2" SW/ BW, 3", 4" BW), and recommended strainer (see page 7). Weld neck flange and ODS available. See controller options on page 31.

ACCESSORIES

Cat. Number	Description	List Price
MCT	Manual Control Tool	\$463
HUPS	Power Backup System for loss of Power Close/Open (Includes Battery Backup and DC power Supply for up to 3 MCV/R's)	\$1,629
75-1327	KIT,POWER SUPPLY,24VDC,60W,MCV,HUPS COMPONENT	\$254



NOTE: Use Technical Equipment Discount Schedule

POWERHEAD CONVERSION KITS (SMV to MCV)

Part Number	Description	List Price
75-1363	7/32" MCXV/A Conversion Kit: Motor Actuator, bonnet, bolts, cartridge, oring, gasket, grease, dongle	\$3,219
75-1364	9/32" MCXV/B Conversion Kit: Motor Actuator, bonnet, bolts, cartridge, oring, gasket, grease, dongle	\$3,219
75-1362	1/16" MCXV/c Conversion Kit: Motor Actuator, bonnet, bolts, cartridge, oring, gasket, grease, dongle	\$3,219
75-1318	3/4 to 1-1/4" Conversion Kit: Motor Actuator, bonnet, bolts, cartridge, oring, gasket, grease, dongle	\$3,219
75-1319	1-1/2" to 2" Conversion Kit: Motor Actuator, bonnet, bolts, cartridge, o- ring, gasket, grease, dongle	\$4,024
75-1347	3" Conversion Kit: Motor Actuator, bonnet, bolts, oring, gasket, grease, dongle (New V-port/ cartridge kit required)	\$4,214
75-1348	4" Conversion Kit: Motor Actuator, bonnet, bolts, oring, gasket, grease, dongle (New V-port, cartridge kit required)	\$4,979



Kit Includes all parts necessary to field-convert an existing HMXV, HMMR/V, HMSV to the new style MCV/R. However, a MCT tool is required and a new V-Port Kit may also be required. For Power-Close HMXVC, HMMRC/HMMVC models, a HUPS will be required; see page 28.

Note: **USE PARTS DISCOUNT SCHEDULE**

VALVE CONTROLLERS FOR MOTORIZED CONTROL VALVES

Hansen stand-alone controllers are suitable for applications where computer control is either not desired or not available. Controllers require 24V AC or DC power. A separate, external 24 VDC power supply (such as PSU) may be required to power level or pressure transducers.

To Order: Specify model number. For DX Controllers and Sensors See page 25

Note: Use Technical Equipment Discount

CONTROLLERS		
PXVC-PT	Superheat/Supercooling Controller (includes TS2 temp sensor; requires PT2 pressure transducer, not included see below)	\$584
PXVC-DX	DX Controller (HPT not included, see below)	\$461
PXVC-T	Temperature Controller (includes TS1 temp sensor)	\$504
PXVC-L	Level Controller (level sensor not included)	\$461
PXVC-P	Pressure Controller (transducer not included, see PT3 below)	\$461
SENSORS		
PT2	Pressure Transducer, 15" - 85 psig, 4-20mA, 1/4" MPT	\$566
PT3	Pressure Transducer, 15" - 285 psig, 4-20mA (for PXVC-P)	\$1008
IMW	Immersion Well for above, SS, 4" insert, 1/2" MPT	\$49
ACCESSORIES		
WTE3	Water tight Enclosure (NEMA4), for above controllers	\$230
PSU2	Compact Power Supply (100-240VAC: 24VDC) for above enclosure	\$314
RDR	Optional remote digital readout	\$960



PXVC

HPT PRESSURE/TEMPERATURE TRANSDUCER

The HPT Pressure/Temperature Transducer is designed to measure both temperature and pressure within a single connection. Electronics calculate superheat or subcooling for the specified refrigerant with a 4-20 mA Output.

Refrigerant	Catalog Number		List Price
	Standard -35°F to +150°F (-37°C to +65°C)	Low Temperature -60°F to +150°F (-51°C to +65°C)	
For Ammonia	HPT717	HPTL717	\$1,587
For R-22	HPT22	HPTL22	\$1,678
For R-134a	HPT134	HPTL134	
For R-404A	HPT404	HPTL404	
For R-507A	HPT507	HPTL507	
For Propane	HPT290	HPTL290	



HPT

Standard model is suitable for ammonia. Also suitable for halocarbons, propane, and carbon dioxide with the appropriate refrigerant key. Standard model HPT is suitable for -35°F to +150°F (-37°C to +65°C).

Low temperature model HPTL is suitable for -60°F to +150°F (-51°C to +65°C). Low temperature models have a longer insertion length. To Order: Specify model number and refrigerant. Note: Use Technical Equipment Discount Schedule.

GAS DETECTION SENSORS

Sensor technologies available for Ammonia, Halocarbon, CO₂ and other Hansen approved gases.

To Order: Specify model, range and refrigerant. Shipping weight: 2 lbs (.91 kg).

Note: Use Technical Equipment Discount Schedule

Ammonia Sensors						
Catalog No.			Sensor Type	Ranges (PPM)	List Price	
Standard 0F (-17C)	Harsh -40F(-40C)	Extreme -60F(-51C)				
HGD-EC-NH3-100			Not Offered	Electrochemical	0-100	\$1,757
Not Offered	Not Offered	Not Offered	Not Offered	Electrochemical	0-250	N/A
HGD-EC-NH3-1000			Not Offered	Electrochemical	0-1,000	\$1,757
HGD-EC-NH3-5000			Not Offered	Electrochemical	0-5,000	\$1,757

Halocarbon Sensors						
Catalog No.			Sensor Type	Ranges (PPM)	List Price	
Basic 32F(0C)	Harsh -40F(-40C)	Extreme -60F(-51C)				
HGD-SC-R22-1000			Not Offered	Semiconductor	0-1,000	\$1,569
HGD-SC-R134A-1000			Not Offered	Semiconductor	0-1,000	\$1,569
HGD-SC-R404A-1000			Not Offered	Semiconductor	0-1,000	\$1,569
HGD-SC-R407A-1000			Not Offered	Semiconductor	0-1,000	\$1,569
HGD-SC-R410A-1000			Not Offered	Semiconductor	0-1,000	\$1,569
HGD-SC-R507A-1000			Not Offered	Semiconductor	0-1,000	\$1,569

CO2 Sensors					
Catalog No.			Sensor Type	Ranges (PPM)	List Price
Basic 32F(0C)	Harsh -40F(-40C)	Extreme -60F(-51C)			
Not Offered	HGD-IR-CO2-10000	Not Offered	Infrared	0-10,000	\$1,810

Gas Detection Monitors		
Catalog No.	# Channels	List Price
HGD-C-2	2	\$1,515
HGD-C-8	8	\$3,193



HANSEN monitor



Gas Sensor

Note: Older Style Gas Sensors (HEC, HVSC, HSC, etc.) and Gas Monitors (HLM2/HLM6) are no longer available. Limited replacement Gas Sensor Element Kits are still available, see Page 33.

GAS DETECTION ACCESSORIES

Gas Detection Sensor Calibration Kit

Calibration Kit includes portable carrying case with space for two 17 liter gas cylinders, valve, and hose connection to sensor. **HGD Calibration Kit #31-1037 / List Price \$618.** Cylinder will calibrate approximately three sensors. Other gases available upon request. Only available in USA.

Note: Use Technical Discount Schedule. **Gas cylinders sold separately.**

Calibration Gas Cylinders

Refrigerant Gas	Range (PPM)		Catalog No.		List Price
Ammonia *	100 *		31-0031		\$269
Ammonia *	250 *		31-0032		
Ammonia *	1000 *		31-0033		
Ammonia	10,000		31-0034		
R22	1,000	3,000	31-0035	31-0078	
R404/R507	3,000		31-0079		
R134a	3,000	5,000	31-0080	31-0124	
R401a	3,000		31-0081		
R402a	3,000		31-0082		
R410	5,000		31-0130		
* 34L Cylinder: 31-0164 (250ppm), 31-0165 (100ppm), 31-0166 (1000ppm) @ \$546 List					



Calibration Kit
(Gas Cylinder Sold Separately)

CONSTANT FLOW REGULATORS

Designed to accurately control the flow rate from refrigerant pumps independent of pressure changes. A constant flow regulator can minimize the tendency of a pump cavitating. A constant flow regulator can also be used to control flow to individual circuits of large evaporators in place of hand expansion valves or other balancing devices in liquid overfeed systems.

To Order: Specify model, refrigerant, connection size and style. Other refrigerants available, contract factory.

Model	Description	List Price
HFC14F	FLOW CONTROLLER,R22,14 GPM,3/4"SW FLG	\$ 1,153
HFC14N	FLOW CONTROLLER,NH3,14 GPM,3/4" SW FLANGE	\$ 1,153
HFC32F	FLOW CONTROLLER, R22, 32 GPM, 1-1/4"SW FLG.	\$ 1,153
HFC32N	FLOW CONTROLLER,NH3,32 GPM,1-1/4"SW FLG	\$ 1,153
HFC40N	FLOW CONTROLLER,NH3,40 GPM,1-1/4"SW FLGS	\$ 1,446
HFC60F	FLOW CONTROLLER,R22,60GPM,1-1/2"SW FLG	\$ 1,446
HFC60N	FLOW CONTROLLER,NH3,60 GPM,1-1/2"SW FLG	\$ 1,446
HFC95F	FLOW CONTROLLER,R22,95 GPM,2"SW FLG	\$ 2,601
HFC98N	FLOW CONTROLLER,NH3,98 GPM,2"SW FLG	\$ 2,601
HFC175F	FLOW CONTROLLER,R22,175GPM,2-1/2"SW FLG	\$ 2,757
HFC185N	FLOW CONTROLLER,NH3,185 GPM,2-1/2"SW FLG	\$ 2,757



PUMP GUARDIAN PUMP CONTROLLER

Designed to safeguard refrigerant liquid pumps. Alerts operators of harmful operating conditions. Prevents excess-recycling and unnecessary damage. Provides protection against cavitation, low liquid level, insufficient or loss of pump pressure, and motor-temperature. Nonvolatile electronic memory. For use with Hansen Hermetic refrigerant pumps; requires a Pressure-Stat to monitor pressure, **Part No. 61-0418**, see Parts List Pricing.

To Order: Specify model number and voltage (115V or 230V; 50/60Hz). **Note:** Use Technical Equipment Discount Schedule.

Model	Description	List Price	Weight lbs (kg)
PG1	Pump Guardian	\$1447	3 (1.4)



PG1

This listing is not intended to be a complete offering of spare parts. Items not listed will be promptly quoted; please contact Hansen Customer Service at 800.426.7368 or via email at sales@hantech.com with part number and description of part.

Note: Use Parts Discount Schedule. If ordering quantity of 12 or more flange gaskets, 50% discount.

ITEM	DESCRIPTION	PRICE	ITEM	DESCRIPTION	PRICE
20-1018	FLOAT SWITCH, HLLSW, LONG LEADS FOR AP, APW, APP, APPT	\$842	20-2623	KIT, FUSE, 8 AMP, 230V FOR APP & APPT	\$19
20-1183	(WHITE) CHECK VALVE, 1 PSID W/1/32" ORIFICE FOR AP, APW	\$305	20-2626	KIT, PLC MODULE, THERMOCOUPLE INPUT, ENHANCED	\$1,145
20-1184	(BLUE) CHECK VALVE, 30 PSID FOR AP, APW	\$305	20-2627	KIT, PLC MODULE, CURRENT INPUT, APP & APPT	\$840
20-1185	(GREEN) CHECK VALVE, 225 PSID FOR AP, APW	\$314	20-2628	KIT, PLC MODULE, AC OUTPUT, APP & APPT	\$227
20-1186	METERING VALVE FOR AP, APW, APP, APPT	\$736	20-2629	KIT, PLC MODULE, AC INPUT/OUTPUT, APP & APPT	\$227
20-1196	TIMER BOARD CABLE FOR AP, APW	\$85	20-2657	KIT, AP PURG CNTRL BD LESS CON, 120V/240V	\$1,288
20-1197	PURGER TO TIMER CABLE, AP, APW	\$82	20-2716	NEAP PREVENTATIVE MAINTENANCE KIT	\$1,342
20-1198	METERING VALVE SEAL KIT	\$55	20-2743	KIT, LIQUID FEED VALVE, AP	\$2,276
20-1205	TRANSFORMER-115/60HZ-24V/60HZ, AP, APW	\$155	20-2744	KIT, LIQUID FEED RETRO FIT, AP	\$2,635
20-1214	CHECK VALVE SEAL KIT	\$38	20-2747	KIT, JUMPER, APM	\$86
20-1236ACT	1/2" NPT X 2" NIPPLE, ACT	\$28	30-1103	TSTAT REPLACE KIT, 1-1/2" X 2", RG A 130F(54C) NOMINAL	\$450
20-1280	4-DIGIT COUNTER WITH RESET & BRACKET, AP, APW	\$280	30-1104	TSTAT REPLACE KIT, 1-1/2" X 2", RG B 120F(49C) NOMINAL	\$450
20-1281	5 AMP FUSE, 115V FOR AP, APW	\$19	30-1105	TSTAT REPLACE KIT, 1-1/2" X 2", RG D 140F(60C) NOMINAL	\$450
20-1311	3/4" FPT X 1/2" LIQUID DRAINER, AP, APW	\$843	30-1106	TSTAT REPLACE KIT, 2-1/2" X 3", RG A 130F(54C) NOMINAL	\$1,053
20-1379	O-RING (-238) BUBBLER	\$17	30-1109	TSTAT REPLACE KIT, 2-1/2" X 3", RG B 120F(49C) NOMINAL	\$1,053
20-1460	WATER BUBBLER BRUSH	\$55	30-1112	TSTAT REPLACE KIT, 1", RG B 120F(49C) NOMINAL	\$445
20-1498	TIME DELAY RELAY, 1 HR FIX W/OFF SWITCH, 120V MXE CE	\$545	30-1113	TSTAT REPLACE KIT, 1", RG D 140F(60C) NOMINAL	\$445
20-1499	PURGER CONT BRD W/PLUG-IN CONN. ALL 'AP' MODELS	\$1,467	30-1115	TSTAT REPLACE KIT, 1", RG G 170F(77C) NOMINAL	\$445
20-1500	8-PT TIMER BRD W/PLUG-IN CONN. 'AP' MODELS EXCEPT APC	\$2,255	30-1118	TSTAT REPLACE KIT, 1-1/2" X 2", RG H 110F(43C) NOMINAL	\$450
20-1648	1/2" METERING VALVE STRAINER FOR AP, APW, APP, APPT	\$344	31-1033	HGD-KIT, ELECTROCHEMICAL, ELEMENT, NH3, 0-100PPM	\$1,100
20-1698	3AMP FUSE, FAST ACTING 5MM	\$19	31-1034	HGD-KIT, ELECTROCHEMICAL, ELEMENT, NH3, 0-1000PPM	\$1,100
20-1737	METERING STRAINER BASKET KIT	\$160	31-1035	HGD-KIT, ELECTROCHEMICAL, ELEMENT, NH3, 0-5000PPM	\$1,100
20-1738	FLOAT BALL ASSEMBLY FOR AUTO-PURGER	\$416	31-1036	HGD-KIT, ELEMENT, SEMICONDUCTOR, R22, 0-1000PPM	\$597
20-1802ACT	NIPPLE, 3/4" X 2-1/2" SCH 80, ACT	\$43	31-1038	HGD-KIT, ELEMENT, SEMICONDUCTOR, R134A, 0-1000PPM	\$597
20-1845	4-POINT POWER BOARD FOR APM	\$1,818	31-1039	HGD-KIT, ELEMENT, SEMICONDUCTOR, R404A, 0-1000PPM	\$597
20-1948	ROTARY SWITCH WITH LEADS FOR AP08	\$1,878	31-1040	HGD-KIT, ELEMENT, SEMICONDUCTOR, R410A, 0-1000PPM	\$597
20-1959	UNIVERSAL WATER BUBBLER KIT	\$819	31-1041	HGD-KIT, ELEMENT, SEMICONDUCTOR, R507A, 0-1000PPM	\$597
20-1985	WATER FLOW CONTROLLER FOR AP, APM, & APP	\$118	31-1043	HGD-KIT, ELEMENT, SEMICONDUCTOR, R407A, 0-1000PPM	\$605
20-2166	O-RING FOR NEAP FLOAT BALL SEAT	\$19	40-1003	KIT, BLUE INSTALL DATE TAG	\$24
20-2167	VESSEL COVER O-RING FOR NON-ELECTRICAL AUTO-PURGER	\$35	40-1004	KIT, GREEN INSTALL DATE TAG (R & EZB/C/E/F)	\$24
20-2177	STRAINER/ORIFICE SCREEN ASSEMBLY KIT FOR APM	\$118	40-1007	O-RING KIT, EZB/C (10 SETS)	\$27
20-2199	80 PSID CHECK VALVE ASSM TEMP VLV, FOR NEAP PURGER	\$374	40-1013	KIT, POP-EYE TEST MAGNET	\$43
20-2200	TEMPERATURE VALVE ASSEMBLY KIT FOR NEAP PURGER	\$258	50-0720ACT	NIPPLE, 1" SCH 80 X 2-1/2" LONG, ACT	\$45
20-2201	FLOAT BALL PLUNGER KIT FOR NEAP PURGER	\$177	50-0721ACT	NIPPLE 1-1/4" SCHEDULE 80 X 2-1/2", ACT	\$49
20-2202	KIT, FLOAT BALL SEAT, NEAP	\$175	50-1005	HANDWHEEL KIT FOR 1/2" - 1-1/4" SHUT-OFF VALVE	\$58
20-2203	STRAINER ORIFICE KIT FOR NEAP	\$229	50-1011	BONNET ASSY, 1 1/4" OLD STYLE THRD BONNET, EXP. REG.	\$262
20-2204	225 PSI CHECK VALVE KIT FOR APM & NEAP PURGER	\$188	50-1012	BAR HANDLE KIT FOR 3/8" - 1-1/4" EXPANSION VALVE	\$54
20-2207	SIGHT GLASS, NEAP	\$48	50-1021	BONNET ASSEMBLY, 1", 1-1/4" OLD STYLE THRD BONNET SOV	\$209
20-2285	STRAINER/ORIFICE SCREEN ASSEMBLY KIT FOR APMF	\$209	50-1023	GASKET KIT 1-1/2", 2" AS/GS RS/VS SHUT-OFF VLV	\$55
20-2300	4-POINT CONTROL BOARD ASSEMBLY FOR APM	\$2,212	50-1024	KIT, BONNET ASSY FOR 1-1/2", 2" AS/GS SOV	\$420
20-2303	TEMPERATURE SENSOR FOR THE APM AND APMF	\$85	50-1026	HANDWHEEL KIT FOR 1-1/2" - 2" AS/GS SHUT-OFF VALVE	\$97
20-2369	THERMOSTATIC EXPANSION VLV 1 TON, NEAP	\$1,279	50-1027	SEAL CAP KIT W/GASKET 1-1/2", 2" AS/GS SHUTOFF VLV	\$118
20-2379	80 PSID CHECK VALVE ASSEMBLY FOR APM	\$334	50-1028	BONNET ASSEMBLY, 1/2" & 3/4" AT, GT, AW, GW SHUT-OFF	\$158
20-2390	SPORLAN GASKET, PXV, LMC	\$18	50-1036	KIT, SEAL CAP, BLACK, 3/8" - 1-1/4" AS/GS, AT/GT, 3/8" - 1/2" GAUGE VLV	\$53
20-2396	APMC CONTROL BOARD	\$2,154	50-1037	HANDWHEEL KIT FOR 2-1/2" & 3" 4" SHUT-OFF VALVE	\$134
20-2400	KIT, BASIC, MAINTENANCE FOR AP	\$1,608	50-1038	SEAL CAP KIT FOR BLUE 2-1/2", 3", 4" SHUT-OFF VALVE	\$196
20-2401	KIT, COMPLETE, MAINTENANCE FOR AP	\$2,543	50-1039	BAR HANDLE KIT 1-1/2", 2" RS/VS, RW/VW EXPANSION REG	\$75
20-2428	ELECTRIC HEATER, 115V	\$439	50-1040	GASKET KIT FOR 3/8" - 1-1/4" AS/GS/AT/GT SOV	\$43
20-2429	THERMOCOUPLE, APP PLATE	\$287	50-1041	BONNET ASSM FOR 3/8", 1/2" 3/4" AS/GS, AT/GT S-OFF VL	\$177
20-2430	THERMOCOUPLE, APP LIQUID	\$382	50-1042	SEAT DISC ASSY KIT, 1/2, 3/4 SW, 3/8, 1/2, 3/4 FPT SHUT-OFF	\$90
20-2431	THERMOCOUPLE, APP SHELL	\$373	50-1043	GASKET KIT FOR 2-1/2", 3", AS/GS, AW/GW SHUT-OFF VLV	\$57
20-2432	KIT, VAPOR TRAP, APPT	\$1,212	50-1044	BONNET ASSEMBLY FOR 2-1/2" & 3" AS/GS, AW/GW SHUT-O	\$545
20-2471	APMC POWER BOARD	\$1,781	50-1046	THROTTLING PLUG ASSEM 1-1/2" RS/VS EXPANSION REG.	\$280
20-2477	ELECTRIC HEATER, 230V	\$344	50-1048	KIT, YELLOW SEAL CAP, 1-1/2" - 2" HEV	\$99
20-2489	CHECK VALVE, 1 PSID NO ORIFICE, FOR APP	\$288	50-1054	KIT, THROTTLING PLUG ASSY, RS/RSB/VS/VS076 EXP REG	\$128
20-2596	KIT, THERMOSTATS, W/ BUSHINGS & BRACKETS	\$555	50-1065	GASKET KIT, 4" SHUT-OFF VALVE, AW/GW	\$78
20-2620	KIT, FUSE, 2 AMP, 115V FOR APP & APPT	\$18	50-1066	BONNET ASSEMBLY KIT, 4" AW/GW SHUT-OFF VALVE	\$744
20-2622	KIT, FUSE, 3 AMP, 230V FOR APP & APPT	\$19	50-1067	SEAT DISC ASSY FOR 4" AW, GW SHUT-OFF VALVE	\$188
			50-1070	KIT, GASKET 1/4" GAUGE, PURGE & NEEDLE VALVES	\$27
			50-1071	SC KIT FOR HANSEN, GAUGE VLV, 1/4"	\$55

ITEM	DESCRIPTION	PRICE	ITEM	DESCRIPTION	PRICE
50-1081	BONNET ASSY KIT, 6" SHUTOFF VALVE, AW/GW	\$1,436	75-0138	FLANGE GASKET, 1 1/2"- 2" HA4A, HS4A, ETC	\$22
50-1082	GASKET KIT, 5" SHUTOFF VALVE, AW/GW	\$96	75-0189	PLUG, 1/4" NPT HEX HEAD	\$19
50-1083	GASKET KIT, 6" SHUT-OFF VALVE, AW/GW	\$101	75-0196	GASKET, ST, HCK2, HS9B BONNET 1-1/2"-2"	\$25
50-1084	GASKET KIT, 8" SHUT-OFF VALVE, AW/GW	\$191	75-0253	FLANGE GASKET, 4" HA4A, HS4A, ETC	\$28
50-1089	HANDWHEEL KIT, 5" & 6" SHUT- OFF VALVE, AW/GW	\$203	75-0263	SEAT RING REMOVAL TOOL, 2 1/2" HA4A/HS4A	\$232
50-1090	HANDWHEEL KIT, 8" SHUT- OFF VALVE, AW/GW	\$373	75-0264	SEAT RING REMOVAL TOOL, 1 1/2" - 2" HA4A/HS4A	\$359
50-1091	SEAL CAP KIT, 5" & 6" SHUT-OFF VALVE, AW/GW	\$188	75-0265	SEAT RING REMOVAL TOOL, 4" HA4A/HS4A	\$308
50-1092	SEAL CAP KIT, 8" SHUT-OFF, AW/GW	\$310	75-0709	LOW RISE CAM, 60 PSI HONEYWELL	\$437
50-1094	BONNET ASSY KIT, 1/2" & 3/4" 4-BOLT SHUT-OFF VALVE,	\$209	75-0759	SEAT RING REMOVAL TOOL, 5" - 6"	\$1,975
50-1095	BONNET ASSY KIT 1-1/4" 4-BOLT SHUT-OFF VALVE	\$209	75-1004	PISTON/SEAT KIT, 2" HCK2	\$288
50-1106	BONNET ASSY KIT, 1" 4-BOLT EXPANSION VALVE	\$211	75-1005	PISTON/SEAT KIT, 2 1/2" HCK2	\$353
50-1107	BONNET ASSY KIT, 1-1/4" 4-BOLT EXPANSION VALVE	\$245	75-1006	PISTON/SEAT KIT, 3" HCK2	\$374
50-1122	GASKET KIT, 10" BW SHUT-OFF VALVE, AW/GW	\$419	75-1007	GASKET KIT, 1 1/2" - 2" HCK2, HS9B	\$55
50-1171	KIT, GASKET 1/2" - 1 1/4" EXT. NECK SHUT-OFF	\$35	75-1008	GASKET KIT, 2 1/2" HCK2, HS9B	\$58
50-1172	BONNET KIT FOR 1/2" AND 3/4" EXT. NECK SOV	\$243	75-1009	GASKET KIT, 3" HCK2, HS9B	\$73
50-1212	GREEN SEAL CAP KIT W/O-RING, 3/4"-1-1/4" MVP	\$54	75-1014	KIT, SEAL CAP, 1-1/2", 2" & 3" HS4A/HA4A	\$104
50-1217	KIT, BONNET, 3/4" - 1 1/4", BLANK, MVP-6	\$259	75-1016	KIT, DISC STRAINER, GAS POWERED VLV	\$101
61-0001	DIFFER PRES-STAT 30 SEC DELAY, MANUAL RESET	\$811	75-1017	GASKET KIT, 4" HCK2, HS9B	\$85
61-0418	DIFFERENTIAL PRESSURE STAT, NO DELAY NEMA 4	\$955	75-1018	PISTON KIT, 4" HA4A, HS4A	\$438
65-1003	FLOAT BALL ASSEMBLY KIT FOR HT100MN	\$930	75-1019	PISTON KIT, 3/4" - 1 1/4" HA4A, HS4A	\$206
65-1018	FLOAT BALL ASSEMBLY KIT FOR HT200MN	\$1,249	75-1020	V-PORT/SEAT, 3/4" HA4A, HS4A, HS4D, MVP20	\$184
65-1019	GASKET KIT FOR HT200	\$160	75-1021	V-PORT/SEAT, 1" HA4A, HS4A, HS4D, MVP25	\$243
65-1020	GASKET KIT FOR HT300	\$187	75-1022	V-PORT/SEAT, 1 1/4" HA4A, HS4A, HS4D, MVP32	\$253
65-1023	FLOAT BALL ASSEMBLY KIT FOR HT300MN	\$1,612	75-1023	GASKET KIT, 3/4" - 1 1/4" HA4A, HS4A	\$49
65-1025	FLOAT BALL ASSEMBLY KIT FOR HD101N	\$930	75-1025	PISTON KIT, 1 1/2" - 2" HA4A, HS4A	\$339
67-0009	7 DAY TIMECLOCK 120V/230V (OLD FM/P-71/72-A)	\$243	75-1026	PISTON KIT, 2 1/2" HA4A, HS4A	\$439
67-0029	TIMESWITCH, 24HR GRASSLIN 115V(FM/P-11/12-B)	\$243	75-1027	PISTON KIT, 3" HA4A, HS4A	\$526
67-0030	TIMESWITCH, 7-DAY GRASSLIN 115V(FM/P-71/72-B)	\$243	75-1028	PISTON KIT, 4" HA4A, HS4A	\$586
70-0065	GASKET, 050 FLANGE AND CNTRL VLV PILOT PORT	\$22	75-1029	V-PORT/SEAT, 1 1/2" HA4A, HS4A, HS4D, MVP40	\$271
70-0132	3/4", 1", 1 1/4" FLANGE GASKET	\$22	75-1030	V-PORT/SEAT, 2" HA4A, HS4A, HS4D, MVP50	\$352
70-0579	KNOB, ENCAPSOLATED COIL	\$50	75-1031	V-PORT/SEAT, 2 1/2" HA4A, HS4A, HS4D	\$386
70-0592	PILOT LIGHT KNOB	\$33	75-1032	V-PORT/SEAT, 3" HA4A, HS4A, HS4D	\$416
70-1001	BONNET CARTRIDGE KIT, HS8A/HS8 SOLENOID VALVE	\$262	75-1033	V-PORT/SEAT, 4" HA4A, HS4A, HS4D	\$455
70-1002	PISTON ASSEMBLY KIT, HS8A/HS8 SOLENOID VALVE	\$142	75-1039	GASKET KIT, 1 1/2" - 2" HA4A, HS4A	\$58
70-1003	STEM KIT, HS8A/HS8 SOLENOID VALVE	\$138	75-1040	GASKET KIT, 2 1/2" HA4A, HS4A	\$73
70-1005	GASKET KIT, HS8A/HS8 SOLENOID VALVE	\$58	75-1041	GASKET KIT, 3" HA4A, HS4A	\$78
70-1006	KIT, BOLT & NUT, HS6 & HS8A (LESS STRAINER)	\$20	75-1042	GASKET KIT, 4" HA4A, HS4A	\$85
70-1007	KIT, BOLT (LONG) & NUT, HS6 & HS8A (WITH STRAINER)	\$20	75-1047	3/4" - 1 1/4" SINGLE PORT ADAPTOR KIT, HA4A, HS4A, MVP	\$301
70-1011	GASKET KIT, HS6 SOLENOID VALVE	\$54	75-1048	3/4" - 1 1/4" 3- PORT ADAPTOR KIT, HA4A, HS4A, MVP	\$507
70-1059	SOLENOID TUBE/PLUNGER KIT, STANDARD SOLENOID	\$159	75-1049	1 1/2" - 2" SINGLE PORT ADAPTOR KIT, HS4A, HS4A, MVP	\$494
70-1068	REMOVABLE SEAT/ORIFICE KIT, APM (SOLENOID B OR C)	\$70	75-1050	1 1/2" - 2" 3-PORT ADAPTOR KIT, HS4A, HS4A, MVP	\$627
70-1069	REMOVABLE SEAT/ORIFICE KIT, APM (SOLENOID A)	\$70	75-1051	2 1/2" - 3" SINGLE PORT ADAPTOR KIT, HS4A, HS4A	\$539
70-1072	SOLENOID TUBE/PLUNGER KIT, PXV/PXVW	\$276	75-1052	2 1/2" - 3" 3- PORT ADAPTOR KIT, HS4A, HS4A	\$777
70-1075	SEAL CAP KIT, HS8A, HS6, PRESSURE MODULES	\$27	75-1053	4" SINGLE PORT ADAPTOR KIT, HA4A, HS4A	\$784
70-1109	UPPER PISTON KIT, 3/4" - 1 1/4" HS4D	\$206	75-1056	GASKET KIT, 1/14" HCK2, HS9B	\$55
70-1110	UPPER PISTON KIT, 1 1/2" - 2" HS4D	\$225	75-1071	PORT O-RING & GASKET	\$22
70-1111	UPPER PISTON KIT, 2 1/2" - 3" HS4D	\$317	75-1073	PISTON/SEAT KIT, 1 1.2: HCK2	\$262
70-1114	SOLENOID TUBE/PLUNGER KIT, NORMALLY OPEN SOLENOID	\$429	75-1107	DIAPHRAM KIT, CONTROL MODULES (M3, M3K, MP3P/L)	\$57
70-1125	GASKET KIT, PXVW (USE WITH 78-0016 FOR HS8W)	\$58	75-1108	DIAPHRAM KIT, CONTROL MODULES, RGE V (M3O)	\$57
70-1128	ADJUSTABLE STEM KIT, PXVW	\$136	75-1110	PISTON KIT, 5" - 6" HA4W, HS4W	\$1,639
70-1129	PISTON/SEAT KIT, PXVW	\$183	75-1111	GASKET KIT, 5" - 6" HA4W, HS4W	\$158
70-1130	CONNECTOR/GASKET/SCREW KIT, DIN COIL	\$25	75-1112	V-PORT/SEAT KIT, 5" HA4W, HS4W	\$994
70-1132	PISTON/SEAT KIT, HS8W	\$281	75-1113	V-PORT/SEAT KIT, 6" HA4W, HS4W	\$1,192
70-1133	BONNET CARTRIDGE KIT, PXVW	\$523	75-1114	4" 3-PORT ADAPTOR KIT, HA4A, HS4A, HS4D	\$1,492
70-1145	KIT, SEAT/TOOL, HS8W	\$193	75-1120	KIT, PISTON/SEAT, HS9B, 4"	\$820
72-0066	O-RING (-115) SOLENOID TUBE AND CHECK VALVE	\$18	75-1129	V-PORT/SEAT KIT, 3/4" HA4AO/AK, MVP20-AO/AK (5# SPRG)	\$187
75-0093	BOTTOM COVER/ADAPT GASKET, 2 1/2"-3"STR/CONTRL. VALVE	\$28	75-1130	V-PORT/SEAT KIT, 1" HA4AO/AK, MVP25-AO/AK (5# SPRG)	\$243
75-0094	SEAT RING REMOVAL TOOL, 3" HA4A/HS4A	\$260	75-1131	V-PORT/SEAT KIT, 1 1/4" HA4AO/AK, MVP32-AO/AK (5# SPRG)	\$260
75-0125	FLANGE GASKET, 2 1/2" HA4A, HS4A, ETC	\$22	75-1140	DIAPHRAM KIT, HA4AM CONTROL MODULE	\$54
75-0128	GASKET, ADAPTOR	\$28	75-1216	KIT, PISTON/SEAT, HCK5D, 1-1/2" & 2"	\$1,039
75-0137	FLANGE GASKET, 3" HA4A, HS4A, ETC	\$25	75-1217	KIT, PISTON/SEAT, HCK5D, 2-1/2"	\$1,039
			75-1219	KIT, PISTON/SEAT, HCK5D, 4"	\$1,955
			75-1220	KIT, GASKET, HCK5D, 1-1/2" & 2"	\$54

ITEM	DESCRIPTION	PRICE	ITEM	DESCRIPTION	PRICE
75-1221	KIT, GASKET, HCK5D, 3"	\$74	75-1388	V-PORT KIT, 1 1/2" (40) MCR/MVP(P3), CV=12	\$639
75-1222	KIT, GASKET, HCK5D, 4"	\$91	75-1389	V-PORT KIT, 2" (50) MCR/MVP(P3), CV=16	\$639
75-1247	BONNET KIT, MVP20 - 32 (3/4" - 1 1/4"), -3 & -4	\$298	75-1392	MOTOR ACTUATOR, MCV/MCR100 (4") (NO CABLES)	\$2,370
75-1248	BONNET KIT, MVP20-2 (3/4")	\$189	75-1403	V-PORT KIT, MCV-MVP, P4, 3/4"-1-1/4", CV=6.4	\$264
75-1252	BONNET KIT, MVP40 -50 (1 1/2" - 2"), - 3 & -4	\$540	75-1404	V-PORT KIT, MCV-MVP, P4, 3/4"-1-1/4", CV=11.7	\$264
75-1257	PISTON KIT, MVP20-3 (3/4")	\$213	75-1405	V-PORT KIT, MCV-MVP, P4, 3/4"-1-1/4", CV=16.4	\$264
75-1258	PISTON KIT, MVP25-3 (1")	\$211	75-1406	V-PORT KIT, MCV-MVP, P4, 1-1/2"-2", CV=35	\$357
75-1259	PISTON KIT, MVP32-3 (1 1/4")	\$215	75-1407	V-PORT KIT, MCV-MVP, P4, 3/4", CV=2.2	\$264
75-1260	PISTON KIT, MVP40-3 (1 1/2")	\$433	75-1408	V-PORT KIT, MCV-MVP, P4, 3/4"-1-1/4", CV=3.9	\$264
75-1261	PISTON KIT, MVP50-3 (2")	\$443	75-1409	V-PORT KIT, MCV-MVP, P4, 1-1/2"-2", CV=12	\$357
75-1262	PISTON KIT, MVP20-3 & -4 (3/4")	\$165	75-1410	V-PORT KIT, MCV-MVP, P4, 1-1/2"-2", CV=16	\$357
75-1263	PISTON KIT, MVP25-3 & -4 (1")	\$170	75-1411	V-PORT KIT, MCV-MVP, P4, 1-1/2"-2", CV=47	\$357
75-1264	PISTON KIT, MVP32-3 & -4 (1 1/4")	\$193	75-1412	V-PORT KIT, MCV-MVP, P4, 3/4"-1-1/4", 50%, CV=1.2	\$403
75-1265	PISTON KIT, MVP40-3 & -4 (1 1/2")	\$314	75-1413	V-PORT KIT, MCV-MVP, P4, 3/4"-1-1/4", 25%, CV=0.8	\$403
75-1266	PISTON KIT, MVP50-3 & -4 (2")	\$327	75-1414	V-PORT KIT, MCV-MVP, P4, 1-1/2"-2", 50%, CV=6.0	\$204
75-1276	SEAT RING KIT, 3/4" - 1" HA4W/HS4W/MVP20-25	\$380	75-1422	DISC STRAINER/ORIFICE KIT, GAS POWERED VALVE	\$183
75-1277	V-PORT/SEAT KIT, 1" HA4W/HS4W	\$406	75-1457	KIT,V-PORT & CARTRIDGE, 3" MCV80, CV=104	\$3,036
75-1278	SEAT RING KIT, 1 1/4" HA4W/HS4W/MVP32	\$573	75-1458	KIT,V-PORT & CARTRIDGE, 3" MCR80, CV=35	\$3,036
75-1279	V-PORT/SEAT KIT, 3/4" -25% HA4A/HS4A/HS4D/MVP20	\$187	75-1459	KIT,V-PORT & CARTRIDGE, 4" MCV100, CV=166	\$3,975
75-1280	V-PORT/SEAT KIT, 3/4" -50% HA4A/HS4A/HS4D/MVP21	\$198	75-1460	KIT,V-PORT & CARTRIDGE, 4" MCR100, CV=47	\$3,975
75-1281	GASKET KIT, BASIC, MVP20 - 32 (3/4" - 1 1/4")	\$40	75-2444	SEAT RING REMOVAL TOOL, 3/4" - 1 1/4" HA4W/HS4W/MVP	\$203
75-1282	GASKET KIT, BASIC, MVP40 - 50 (1 1/2" - 2")	\$48	75-2735	TURNS OPEN TAG, MVP/PXVW60/HEV	\$27
75-1287	SEAT RING KIT, 1 1/2" - 2" HA4A/HS4A/MVP40-50	\$196	75-3245	SPOOL KIT, MVP20-2, -3, -4 & -5 (3/4")	\$113
75-1304	KIT, P4 1/2" PISTON, STOP/CHECK/EXP	\$146	75-3246	SPOOL KIT, MVP20-32 -1 (3/4"-1 1/4"), MVP25 & 32 -2, -3, -4 & -5	\$113
75-1318	CONVERSION KIT, SMV (3/4" - 1 1/4") to MCV/MCR20 - 32	\$3,219	75-3247	SPOOL KIT, MVP40 - 50 (1 1/2" - 2")	\$180
75-1319	CONVERSION KIT, SMV (1 1/2" - 2") to MCV/MCR40 - 50	\$4,024	75-3517	DONGLE KIT, SMV W/VPIF to MCV/MCR	\$223
75-1321	CABLE KIT, 6.5 FT(2 M) W/PIG TALES	\$142	77-0206	FUSE, VARI-LEVEL CONTROLLER (BUSSMAN #PCC-3)	\$35
75-1322	GASKET KIT, MCV/MCR 20 - 32 (3/4" - 1 1/4")	\$64	77-1000	VLT TRANSMITTER HOUSING ASSEM KIT, 4-20 MA OUTPUT	\$1,922
75-1325	CARTRIDGE ASSEMBLY KIT, MCV/MCR 20 - 32 (3/4" - 1 1/4")	\$1,163	77-1002	REFLEX LENS KIT, SEE-LEVEL	\$76
75-1326	CARTRIDGE ASSEMBLY KIT, MCV/MCR40 - 50 (1 1/2" - 2")	\$1,278	77-1003	FROST SHIELD KIT, SEE-LEVEL	\$85
75-1327	POWER SUPPLY KIT, HUPS, 24VDC (60W)	\$254	77-1005	SHP/SVP TRANSMITTER HOUSING KIT	\$897
75-1328	BATTERY BACKUP KIT, HUPS, 24VDC (60W)	\$1,283	77-1011	VLTR TRANSMITTER HOUSING ASSEMBLY, 4-20 MA OUTPUT	\$2,734
75-1329	CABLE KIT, 16.4 FT (5 M) W/PIG TAILS	\$175	77-1022	LP TRANSMITTER HOUSING KIT, NH3 PROBES	\$744
75-1331	MOTOR ACTUATOR, MCXVIA, B, C (NO CABLES)	\$2,370	77-1023	LP TRANSMITTER HOUSING KIT, HALO	\$852
75-1332	MOTOR ACTUATOR, MCV/MCR 20 - 32 (3/4" - 1 1/4") (NO CABLES)	\$2,370	77-1043	CLEAR LENS KIT, SEE-LEVEL	\$109
75-1333	MOTOR ACTUATOR, MCV/MCR40 - 50 (1 1/2" - 2") (NO CABLES)	\$2,370	77-1044	FROST SHIELD KIT, EXTENDED, SEE-LEVEL	\$96
75-1334	MOTOR ACTUATOR, MCV/MCR80 (3") (NO CABLES)	\$2,370	77-1049	METAL COVER KIT, VLT/HPT/SPS	\$48
75-1336	KIT, CONVERSION, 1-1/2" - 2" MCV - MVP, P3	\$4,546	77-1055	RETAINING RING KIT, SEE-LEVEL	\$87
75-1337	KIT, CONVERSION, 3/4" - 1-1/4" MCV - MVP, P3	\$3,562	77-1058	KIT, APM LEVEL SENSOR, LOW SIDE & DRAINER	\$536
75-1347	CONVERSION KIT, SMV (3") to MCV/MCR80	\$4,214	77-1059	KIT, APM HIGH SIDE SENSOR	\$683
75-1348	CONVERSION KIT, SMV (4") to MCV/MCR100	\$4,979	78-0016	GASKET, ST050 BOTTOM CAP	\$22
75-1351	GASKET KIT, 3" (80) MCV/MCR	\$77	78-0026	GASKET, ST100/ST100D BOTTOM COVER	\$22
75-1352	GASKET KIT, 4" (100) MCV/MCR	\$96	78-0146	O-RING HEAVY DUTY STRAINER BASKET	\$22
75-1357	GASKET KIT, MCXV/A, MCXV/B, MCXV/C	\$57	78-1001	STRAINER SCREEN KIT, ST050/ST050D (100 MESH)	\$68
75-1358	CARTRIDGE ASSEMBLY KIT, MCXV/A, B, C	\$1,217	78-1003	STRAINER SCREEN KIT, ST(W)100/ST(W)100D (60 MESH)	\$117
75-1359	MCXV/C NEEDLE KIT, CV=0.2	\$530	78-1005	STRAINER SCREEN KIT, ST(W)200 (60 MESH)	\$163
75-1360	MCXV/A NEEDLE KIT, CV=0.6	\$530	78-1006	STRAINER SCREEN KIT, ST(W)250 (60 MESH)	\$183
75-1361	MCXV/B NEEDLE KIT, CV=1.0	\$530	78-1007	STRAINER SCREEN KIT, ST300 (60 MESH)	\$196
75-1362	CONVERSION KIT, HMXV to MCXV/C	\$3,219	78-1008	STRAINER SCREEN KIT, ST400 (60 MESH)	\$292
75-1363	CONVERSION KIT, HMXV/A to MCXV/A	\$3,219	78-1010	STRAINER SCREEN KIT, APM, NEAP	\$74
75-1364	CONVERSION KIT, HMXV/B to MCXV/B	\$3,219	78-1013	STRAINER SCREEN KIT, ST(W)100HD HEAVY DUTY (60 MESH)	\$196
75-1365	V-PORT/SEAT KIT, 3/4"-25% HA4AO/AK, MVP20-AO/AK (5# SPR)	\$187	78-1014	STRAINER SCREEN KIT, ST(W)100/100 (100 MESH)	\$310
75-1366	V-PORT/SEAT KIT, 3/4"-50% HA4AO/AK, MVP20-AO/AK (5# SPR)	\$187	78-1015	STRAINER BAG KIT, ST(W)100HD, MVP20 - 32	\$57
75-1381	V-PORT KIT, 3/4"(20) MCV/MVP(P3), 1 1/4"(32) MCR/MVP(P3), CV=6.4	\$541	78-1016	STRAINER BAG KIT, ST(W)200, MVP40 - 50	\$73
75-1382	V-PORT KIT, 1" (25) MCV/MVP(P3), CV=11.7	\$541	78-1017	STRAINER BAG KIT, ST(W)250, ST(W)300	\$78
75-1383	V-PORT KIT, 1 1/4" (32) MCV/MVP(P3), CV=16.4	\$541	78-1018	STRAINER BAG KIT, ST(W)400	\$85
75-1384	V-PORT KIT, 1 1/2" (40) MCV/MVP(P3), CV=35	\$639	78-1020	STRAINER SCREEN KIT, MVP20 - 32 (60 MESH)	\$140
75-1385	V-PORT KIT, 2" (50) MCV/MVP(P3), CV=47	\$639	78-1022	STRAINER CAP KIT W/1/4" DRAIN, ST050D	\$68
75-1386	V-PORT KIT, 3/4" (20) MCR/MVP(P3), CV=2.2	\$541	78-1025	STRAINER SCREEN KIT, ST(W)200/100, MVP40 - 50 (100 MESH)	\$504
75-1387	V-PORT KIT, 1" (25) MCR/MVP(P3), CV=3.9	\$541	78-1026	STRAINER SCREEN KIT, ST(W)250/100 (100 MESH)	\$703
			78-1027	STRAINER SCREEN KIT, MVP20 -32 (100 MESH)	\$337
			WLT-EL	WLT REPLACEMENT HEAD KIT 2-WIRE	\$1,743
			WLT-C-EL	WLT-C REPLACEMENT HEAD KIT 3-WIRE	\$2,109
			WLT-PLUMB	WLT COUNTERWEIGHT KIT	\$105
			WLT-WIRE-MECH	WLT CAPACITANCE WIRE KIT	\$337
			WLT-USB	USB PROGRAMMING CABLE	\$270

Part Kits - Quick Reference Guide

Shut-off Valves, Screwed Bonnet (GT, AT), Threaded

Size	Gasket Kit	Bonnet O-Ring	Screwed Bonnet Kit	Disc Assembly Kit	Handwheel Kit	Seal Cap Kit
3/8"	50-1040 \$43	50-0453	50-1041	50-1042	50-1005 \$58	50-1036 \$53
1/2"		\$22	\$177	\$90		
3/4"		50-0017	50-1021	50-1004		
1"		\$22	\$209	\$96		
1-1/4"						

Shut-off Valves, Bolted Bonnet (GTB, GSB, GS, AS, ASB, AW, GW), Welded

Size	Gasket Kit	Bonnet Gasket/ O-Ring	Bolted Bonnet Kit	Disc Assembly Kit*	Handwheel Kit	Seal Cap Kit
1/2"	50-1040 \$43	50-0805	50-1094	50-1042	50-1005	50-1036
3/4"		\$20	\$209	\$90		
1"		50-0806	50-1095	50-1004	\$58	\$53
1-1/4"		\$20	\$209	\$96		
1-1/2"	50-1023	50-0259	50-1024	50-1025	50-1026	50-1027
2"	\$55	\$22	\$420	\$224	\$97	\$118
2-1/2"	50-1043	50-0310	50-1044	50-1045	50-1037	50-1038
3"	\$57	\$26	\$545	\$156		
4"	50-1065	50-0537	50-1066	50-1067	50-1089	50-1091
	\$78	\$27	\$744	\$188		
5"	50-1082	50-0708	50-1080	50-1086	50-1090	50-1092
	\$96	\$26	\$1217	\$206		
6"	50-1083	50-0709	50-1081	50-1087	50-1131	50-1134
	\$101	\$47	\$1436	\$258		
8"	50-1084	50-0750	50-1085	50-1088	50-1193	50-1194
	\$191	\$50	\$2666	\$279		
10"	50-1122	50-2223	50-1125	50-1128	50-1132	50-1134
	\$419	\$58	\$5844	\$334		
12"	50-1123	50-2260	50-1126	50-1129	50-1193	50-1194
	\$529	\$84	\$8492	\$608		
14"	50-1124	50-2243	50-1127	50-1130	50-1193	50-1194
	\$619	\$103	\$11178	\$763		
16"	50-1196	50-2582	50-1198	50-1200	50-1193	50-1194
	\$1102	\$65	\$21830	\$873		
18"	50-1197	50-2584	50-1199	50-1201	50-1193	50-1194
	\$1108	\$83	\$22066	\$940		

Note: Kits for Extended Neck Valves (1/2"-4") are also available. *Disc Assembly Kit for 10" above includes seat ring and bonnet O-ring only.

Hand Expansion Valves, Bolted Bonnet (RTB, VTB, VS, RSB, VSB, RW, VW)

Size	Gasket Kit	Bonnet Gasket/ O-Ring	HEV Bolted Bonnet Kit	Throttling Plug Kit (Bolted Bonnet)	Bar Handle Kit	Seal Cap Kit (Yellow)		
1/2"	50-1040 \$43	50-0805	50-1104	50-1053	50-1012	50-1049		
			\$183	\$126				
3/4"		50-1105	50-1054					
		\$227	\$128					
1"	50-0806	\$20	50-1106	50-1015	\$54	\$55		
			\$211	\$169				
1-1/4"			50-1107	50-1016				
			\$245	\$205				
1-1/2"	50-1023	50-0259	50-1031	50-1046	50-1039	50-1048		
	\$55	\$22	\$518	\$280			\$75	\$99
2"			50-1032	50-1047				
			\$493	\$364				
2-1/2"	50-1043	50-0310	50-1108	50-1059	50-1051	50-1050		
	\$57	\$26	\$785	\$663			\$91	\$96
3"			50-1078	50-1058				
			\$687	\$688				
4"	50-1065	50-0537	50-1121	50-1063				
	\$78	\$27	\$868	\$636				

Note: Kits for Screwed Bonnet and Extended Neck Valves (1/2"-4") are also available.

Part Kits - Quick Reference Guide

Small Solenoid Valves HS6, HS8A, HS8W, HS7

Size	Gasket Kit	Piston Kit	Cartridge Kit	Seal Cap Kit	Flange Gasket*	Screen Kit (STD)	Strainer Cover Gasket	Tube/Plunger Kit
5/32" (4 mm) HS6	70-1011 \$54	-	-	70-1075 \$27	70-0065 \$22	78-1001 \$68	78-0016 \$22	70-1059 \$159
1/2" (13mm) HS8A	70-1005 \$58	70-1002 \$142	70-1001 \$262		-			
1/2" (13mm) HS8W		70-1132 \$281						
3/4" (20mm) HS7	70-1017 \$73	70-1019 \$323	70-1018 \$345	50-1071 \$55	70-0132 \$22	78-1003 \$117	78-0026 \$22	
1" (25mm) HS7		70-1020 \$345						
1-1/4" (32mm) HS7		70-1021 \$367						

* If ordering quantity of 12 or more flange gaskets, 50% discount.

HS4A Solenoid Valves & HA4A Regulators

Size	Gasket Kit	Piston Kit	V-Port/Seat Kit	Seal Cap Kit	Flange Gasket*	Adpater Gasket	1-Port Adpapter Kit	3-Port Adapter Kit
3/4" (20mm)	75-1023 \$49	75-1019 \$206	75-1020 \$184	50-1071 \$55	70-0132 \$22	75-0489 \$22	75-1047 \$301	75-1048 \$507
1" (25mm)			75-1021 \$243					
1-1/4" (32mm)			75-1022 \$253					
1-1/2" (40mm)	75-1039 \$58	75-1025 \$339	75-1029 \$271	75-1014 \$104	75-0138 \$22	75-0113 \$22	75-1049 \$494	75-1050 \$627
2" (50mm)			75-1030 \$352					
2-1/2" (65mm)	75-1040 \$73	75-1026 \$439	75-1031 \$386		75-0125 \$22	75-0093 \$28	75-1051 \$539	75-1052 \$777
3" (80mm)	75-1041 \$78	75-1027 \$526	75-1032 \$416		75-0137 \$25			
4" (100mm)	75-1042 \$85	75-1028 \$586	75-1033 \$455		50-1027 \$118	75-0253 \$28	75-0233 \$27	75-1053 \$784
5" (125mm)	75-1111 \$158	75-1110 \$1639	75-1112 \$994	50-1038 \$196	-	75-0605 \$55	75-1288 \$2092	-
6" (150mm)			75-1113 \$1192			75-0606 \$58		


Note: Where appropriated, PED versions of above kits are available - contact factory. 5" & 6" Adapter Gasket requires both parts.

Strainers, Flanged or Welded

For Valve Sizes	Cat. No.	60 Mesh Screen	100 Mesh Screen Kit	Cover Gasket	Cloth Bag (filter) Kit
5/32" thru 1/2"	ST050	-	78-1001 \$68	78-0016 \$22	-
3/4" thru 1"	ST100	78-1003 \$117	78-1014 \$310	78-0026 \$22	-
	ST100HD	78-1013 \$196			78-1015 \$57
1-1/2" thru 2"	ST200	78-1005 \$163	78-1025 \$504	75-0196 \$25	78-1016 \$73
2-1/2"	ST250	78-1006 \$183	78-1026 \$703	75-0128 \$28	78-1017 \$78
3"	ST300	78-1007 \$196	-		
4"	ST400	78-1008 \$292	-	75-0234 \$26	78-1018 \$85
5" & 6"	STW500 STW600	78-1009 \$1070	-	75-0605 \$55	-
				75-0606 \$58	

Note: 5" & 6" Cover Gasket requires both parts.

Part Kits - Quick Reference Guide



MVP

Position 1	Size	Gasket Kit	Bonnet Gasket	Bonnet Kit	Disc Assembly	Seal Cap Kit	Handwheel Kit
Shut-off Valve	1/2" (13mm)	50-1040	50-0805	50-1094	50-1042	50-1036	50-1005
	3/4" (20mm)		\$20	\$209	\$90		
	1" (25mm)	\$43	50-0806	50-1095	50-1004	\$53	\$58
	1-1/4" (32mm)	\$20	\$209	\$96			
	1-1/2" (40mm)	50-1023	50-0259	50-1024	50-1025	50-1027	50-1026
	2" (50mm)	\$55	\$22	\$420	\$224	\$118	\$97

Position 2	Size	60 Mesh Screen Kit	100 Mesh Screen Kit	Cover Gasket
Strainer	1/2" (13mm)	-	78-1001 \$68	78-0016 \$22
	3/4" (20mm)	78-1020	78-1027	50-0806
	1" (25mm)	\$140	\$337	\$20
	1-1/4" (32mm)			
	1-1/2" (40mm)	78-1005	78-1025	75-0196
	2" (50mm)	\$163	\$504	\$25

Position 3	Size	Gasket Kit	Piston Kit	V-port/Seat Kit	Seal Cap Kit	Adapter Gasket	1-Port Adapter Kit	3-Port Adapter Kit
Solenoid or Regulator	1/2" (13mm)	70-1005 \$58	70-1132 \$281	-	70-1075 \$27	-	70-1001 \$262	-
	3/4" (20mm)	75-1023 \$49	75-1019 \$206	75-1020 \$184	50-1071 \$55	75-0489 \$22	75-1047 \$301	75-1048 \$507
	1" (25mm)			75-1021 \$243				
	1-1/4" (32mm)			75-1022 \$253				
	1-1/2" (40mm)	75-1039	75-1025	75-1029 \$271	75-1014 \$104	75-0113 \$22	75-1049 \$494	75-1050 \$627
	2" (50mm)	\$58	\$339	75-1030 \$352				

Position 3	Size	Gasket Kit	V-Port/Seat Kit				Cartridge Kit	Actuator Kit
			MCV		MCR/MCX			
Motorized Valve (MCV / MCR)	7/32" (5mm)	75-1338 \$53	-	-	Cv=0.6	75-1375 \$315	75-1339 \$1217	75-1331 \$2370
	9/32" (7mm)		-	-	Cv=1.1	75-1376 \$261		
	1/16" (2mm)		-	-	Cv=0.2	75-1374 \$315		
	3/4" (20mm)	75-1343 \$64	Cv=6.4	75-1381 \$541	Cv=2.2	75-1386 \$541	75-1340 \$1163	75-1332 \$2370
	1" (25mm)		Cv=11.7	75-1382 \$541	Cv=3.9	75-1387 \$541		
	1-1/4" (32mm)		Cv=16.4	75-1383 \$541	Cv=6.4	75-1381 \$541		
	1-1/2" (40mm)	75-1451	Cv=35	75-1384 \$639	Cv=12	75-1388 \$639	75-1341	75-1333
2" (50mm)	\$39	Cv=47	75-1385 \$639	Cv=16	75-1389 \$639	\$1278	\$2370	

Part Kits - Quick Reference Guide

Position 4	Size	Gasket Kit	Bonnet Gasket	Bonnet Kit	Disc Assembly	Seal Cap Kit	Handwheel Kit	Spool or Seat Kit
(-1) Shut-off Valve	1/2" (13mm)	50-1040 \$43	50-0805 \$20	50-1094 \$209	50-1042 \$90	50-1036 \$53	50-1005 \$58	75-1302 \$98
	3/4" (20mm)		50-0806 \$20	50-1095 \$209	50-1004 \$96			75-3246 \$113
	1" (25mm)	50-1023 \$55	50-0259 \$22	50-1024 \$420	50-1025 \$224	50-1027 \$118	50-1026 \$97	75-3247 \$180
	1-1/4" (32mm)							
	1-1/2" (40mm) 2" (50mm)							

Position 4	Size	Gasket Kit	Hand Expansion (-2)		Stop Check / HEV (-3)		Seal Cap Kit	Bar Handle Kit	Spool or Seat Kit
			Bonnet Kit	Throttl Plug	Bonnet Kit	Throttl Plug			
(-2) Hand Expansion or (-3) Stop/check HEV	1/2" (13mm)	50-1040 \$43	50-1104 \$183	50-1053 \$126	75-1305 \$288	75-1304 \$146	50-1049 \$55	50-1012 \$54	75-1302 \$98
	3/4" (20mm)		75-1248 \$189	50-1054 \$128	75-1247 \$298	75-1257 \$213			75-3245 \$113
	1" (25mm)		50-1106 \$211	50-1015 \$169		75-1258 \$211			75-3246 \$113
	1-1/4" (32mm)	50-1107 \$245	50-1016 \$205	75-1252 \$540	75-1259 \$215	50-1048 \$99	50-1039 \$75	75-3247 \$180	
	1-1/2" (40mm)	50-1031 \$518	50-1046 \$280		75-1260 \$433				
	2" (50mm)	50-1032 \$493	50-1047 \$364		75-1261 \$443				

Position 4	Size	Gasket Kit	Stop/Check (-4)		Check (-5)		Seal Cap Kit (Green)	Bar Handle Kit	Spool or Seat Kit
			Bonnet Kit	Piston Kit	Bonnet Kit	Piston Kit			
(-4) Stop/Check or (-5) Check	1/2" (13mm)	50-1040 \$43	75-1305 \$288	75-1303 \$158	75-1306 \$397	75-1303 \$158	50-1212 \$54	50-1012 \$54	75-1302 \$98
	3/4" (20mm)		75-1247 \$298	75-1262 \$165	50-1215 \$259	75-1262 \$165			75-3245 \$113
	1" (25mm)			75-1263 \$170		75-1263 \$170			75-3246 \$113
	1-1/4" (32mm)	50-1023 \$55	75-1264 \$193	75-1265 \$314	50-1216 \$410	75-1264 \$193	50-1213 \$118	50-1039 \$75	75-3247 \$180
	1-1/2" (40mm)		75-1252 \$540		75-1265 \$314	75-1265 \$314			
	2" (50mm)				75-1266 \$327	75-1266 \$327			

Position 4	Size	Gasket Kit	MCX/MRC (-7) V-Port/Seat Kit		Cartridge Kit	Actuator Kit	Spool or Seat Kit
			Cv	Part #			
(-7) Motorized Valve (MCX / MCR)	7/32" (5mm)	75-1373 \$53	Cv=0.6*	75-1371 \$1032	75-1358 \$1217	75-1331 \$2370	See V-Port Seat Kit
	9/32" (7mm)		Cv=1.1*	75-1372 \$1032			
	1/16" (2mm)		Cv=0.2*	75-1370 \$1032			
	3/4" (20mm)	75-1401 \$55	Cv=2.2	75-1407 \$264	75-1380 \$809	75-1332 \$2370	75-1415 \$233
	1" (25mm)		Cv=3.9	75-1408 \$264			75-1415 \$233
	1-1/4" (32mm)		Cv=6.4	75-1403 \$264			
	1-1/2" (40mm)	75-1402 \$100000	Cv=12	75-1409 \$357	75-1342 \$908	75-1333 \$2370	75-1416 \$357
	2" (50mm)		Cv=16	75-1410 \$357			

* Kit includes needle and seat.

TERMS & CONDITIONS AND LIMITED WARRANTY

All quotations, products and services provided by Hansen Technologies, Inc. ("Seller") or its representatives to any customer, distributor, original equipment manufacturer, end-user or other purchaser ("Buyer") are furnished only on the terms and conditions stated herein. By ordering and accepting delivery of products and/or services from Seller, Buyer agrees to and accepts these terms and conditions and agrees that, unless modified by separate negotiated agreement as provided below, these terms and conditions, together with the item, quantity, price, and similar terms as set out in Seller's quotation, order acknowledgement and/or invoice, constitute the entire agreement of the parties, superseding all other communications and documentation. Seller hereby expressly rejects any different or additional terms, preprinted or otherwise, contained or referenced in any purchase order or other documentation furnished by Buyer, whether before or receipt thereof is acknowledged by signature or otherwise. No modification of these terms shall be effective unless set out in a **negotiated agreement signed by an authorized officer of Seller.**

QUOTATIONS & PRICES. Quotations are valid only for the period stated therein, and may be changed or withdrawn at any time prior to acceptance without notice. Quotations to non-U.S. Buyers are solicitations or inquiries for offers to purchase. Clerical or typographical errors are subject to correction. Quoted prices and delivery dates are valid only for the quantities, terms and payment schedule specified. Prices do not include, and Buyer is responsible for payment of, any applicable sales, use, value added, goods and services, excise, property, customs, stamp, documentary, import/export, or other taxes, tariffs, fees, duties, withholdings or like charges, whether domestic or foreign, related to the products and/or services supplied hereunder. Any such amounts paid by Seller will be invoiced to and paid by Buyer unless Buyer provides an exemption certificate acceptable to the applicable government authority.

ORDERS & ACCEPTANCE: Orders must be presented in writing or via electronic means acceptable to Seller and will be binding upon Seller only when accepted by written or electronic acknowledgment. Seller reserves the right, at its option and without liability, to refuse any order, in whole or in part, or to specify an alternate delivery schedule if orders from all sources exceed Seller's inventory or ability to deliver. For special construction orders, Seller will provide an order acknowledgement outlining acceptance of the order and defining any necessary clarifications to terms and conditions, deliverables, pricing, and project schedule. Where orders are placed, acknowledged, and/or invoiced by electronic transmission, the data transmitted will be deemed "in writing" and "signed;" and any printout of electronic transmissions maintained in the ordinary course of business will be considered an "original" and admissible as between the parties to the same extent and under the same conditions as other business records maintained in documentary form. Seller shall be entitled to assume that persons placing orders on behalf of Buyer (electronically or otherwise) are authorized to do so and to accept the terms and conditions herein.

CHANGE AND CANCELLATION: Changes requested by Buyer after order acceptance must be submitted in writing and are subject to written acceptance by an authorized representative of Seller. **Cancelled orders are subject to a minimum charge of 30% of value.** Costs and/or delays resulting from such changes will be solely determined by Seller and binding on Buyer. Provided that Seller receives adequate written notice from Buyer, Buyer may cancel or suspend performance of any order for Seller-standard products for convenience, subject to payment of all reasonable charges as solely determined by Seller, which may include, without limitation, special tooling, work in process, handling and storage costs, costs associated with changes in design or specifications, and incidental and consequential damages. **Orders for special construction products, special order pumps and custom length probes are non-refundable and cannot be cancelled once in production.** Seller's performance is subject to approval of Buyer's credit and Seller, with reasonable cause, may cancel or suspend performance of any order placed by Buyer if Buyer fails to meet any of its obligations herein.

PAYMENT TERMS: Unless otherwise specified in Seller's quotation or order acknowledgement, payment terms for U.S. Buyers are net 30 days from date of invoice, subject to approved credit at the time of order invoicing. Orders from outside the U.S. or Euro Zone require advance remittance by wire transfer; alternate international payment terms are considered upon request. Deposits or down payments, if any, are non-refundable; no discount for early payment is authorized without Seller's written consent. Partial shipments are billed as made and payable on the terms above. Payment terms will not be affected by any delay in delivery, installation or acceptance. Products will remain personal property, even if installed or affixed to any realty or structure. Seller reserves the right to modify payment terms or require prior payment, letter of credit, or COD when, in the opinion of Seller, Buyer's financial condition or previous payment record so warrants. If Buyer becomes delinquent in any payment due, Seller in its discretion may take any and all actions permitted by law, including set off, and may institute credit hold procedures on all open orders. Future orders will not be confirmed until Buyer's account is brought current, including any outstanding interest charges. A service charge (not to exceed 1.5% per month) may be charged on all past due balances. If Seller deems it necessary to refer an account to an agent or attorney for collection, all costs and expenses of collection (including, without limitation, reasonable attorneys' fees) will be charged to Buyer's account, up to the maximum amount allowed by law.

DELIVERY & INSPECTION: All sales are Ex-Works Factory (Incoterms 2010). Title will pass upon issuance of the carrier's bill of lading at Seller's dock (subject to Seller's rights as an unpaid creditor) and, if not previously accepted, receipt of

delivery by or on behalf of Buyer will constitute acceptance of these terms and conditions. Buyer will bear all risk and expense for delivery of goods, including without limitation, shipping, loading, unloading, storage, freight, and insurance. Any shipping contracts made by Seller will be for Buyer's account and, if paid by Seller, will be invoiced to Buyer in addition to the product price. Seller will endeavor to deliver accepted orders promptly; it is understood, however, that dates indicated for delivery or performance represent Seller's best current estimates only and Seller will have no liability for failure to perform within such dates. Products will be packaged for shipment in accordance with Seller's standard commercial practice; however, Seller will not be responsible for loss or damage in transit. Buyer must inspect all items upon arrival and provide written notice to Seller, within 5 business days, of any claim for shortage or other nonconformance. If Buyer fails to give timely notice, all products will be deemed accepted. Use or resale of products in any manner following delivery (regardless of whether installation has occurred) will also constitute acceptance by Buyer. Any claim for loss or damage in transit should be made directly to the delivering carrier.

RETURN POLICY: Except in the case of valid warranty claims, no returns will be accepted after 6 months or without a Return Material Authorization (RMA) number from Seller. Products returned without an RMA number may be returned to Buyer freight collect. To ensure accurate and prompt processing of returns, the RMA number should be referenced on all shipping documents and correspondence. Returned products must be in the same condition as when they were shipped by Seller, and in their original packaging. Returned products must be sent by Buyer freight prepaid and properly boxed to prevent damage in transit. **SELLER WILL NOT ACCEPT ANY C.O.D. PARCELS.** Seller will inspect returned products upon receipt and issue any applicable credits based on the condition of the products and the terms of this policy. For stock items returned, a minimum restocking fee of 30% of the invoice price may be charged. For pressure relief valves (if returned within 60 days from date of shipment from the factory), a 30% restocking fee applies. Pressure relief valves more than 60 days from date of shipment, valves with non-standard pressure settings, special construction products, special order pumps, custom length probes, and end-of-life/last buy orders are non-returnable. After 6 months, all sales are final.

LIMITED WARRANTY:

Product Warranty. Products manufactured by Seller are warranted against defects in materials and workmanship under normal use in a typical operating environment (a) in the case of products other than electric motors and electronic items, for a period of one year from date of shipment from the factory, and (b) in the case of electric motors and electronic items, for a period of ninety (90) days from date of shipment except for where certain Legal Limitations may apply. This warranty extends only to the original Buyer, and shall be in force only upon payment in full for the product(s) to be warranted. Such warranty shall be effective only when products are properly installed, maintained, and serviced in accordance with good commercial practice and in compliance with all local codes and legal requirements, and used and operated in accordance with Seller's catalogs or bulletins for normal refrigeration applications, unless otherwise approved in writing. Products or components not manufactured by Seller are warranted only by the original manufacturer and only if and to the extent set forth in the original manufacturer's warranty, and Seller will have no warranty liability with respect to such third party products or failure of any such supplier to perform under its warranty.

Limited Remedy. Products returned to Seller during the applicable warranty period and found to be defective by factory inspection will be repaired or replaced with a conforming replacement product at Seller's option and without charge. The repaired or replaced product is then warranted for the remaining term of the applicable warranty or 90 days, whichever is longer. Warranty labor repairs may be performed at Seller's designated facility, with Buyer responsible for shipping (FCA Factory) or, at Seller's option, may be performed at Buyer's location, in which case any travel expenses (not to exceed the purchase price of the damaged part) will be borne by Seller, so long as Seller confirms that the defect is covered by warranty and not subject to any Exclusions below. Replaced parts shall become the property of Seller. If repair or replacement is not, in Seller's opinion, commercially feasible, or if Seller refuses or is unable to successfully perform such repair or replacement, Seller will refund an equitable portion of the purchase price paid by Buyer for the product. Seller will not be responsible for any other costs or charges, including without limitation, costs of dismantling, disassembly, de-installation, removal, or reinstallation. Service

required beyond the normal scope of warranty (see Exclusions below) or after expiration of the warranty period are billable repairs. Seller will charge Buyer its then-current prices for parts, labor, and transportation. Receipt and acceptance of a purchase order may be required before commencement of billable repairs. Buyer may also be billed for costs of testing and inspection of returned products with no trouble found Exclusions. Any warranty claim, support claim, or liability is excluded, and Buyer will be solely responsible, for any claim, damage, or liability arising out of (1) improper or faulty installation or failure to provide a suitable installation environment, (2) accident, misuse, abuse, extraordinary wear and tear, or neglect, (3) misapplication, improper use, or failure to follow Seller's operating instructions, safety precautions and bulletins, including lack of routine care or maintenance, use of non-approved refrigerants, or use of products outside of normal or specified operating or environmental conditions, (4) damage, defects, problems, malfunctions, or failures created by any non-Seller products, accessories, software, attachments, or services or their interface with Seller's products, (5) acts of God, electrical power surges, or other causes external to the products, (6) alteration, disassembly, or repair in the field, or (7) any failure to grant Seller the required time and opportunity to carry out any necessary repairs. Products disabled by dirt, debris, or other foreign substances will not be considered defective. Where critical temperature or products are involved, backup temperature controls and alarms are required. It is the responsibility of the installer to add devices (alarms, safety and limit controls, etc.) that protect against or warn of any operating control failure. Users and operators also must be aware that harmful refrigerant properties and pressure could damage products or injure people. Seller's responsibility will in all events be limited to repair or replacement of the failed or defective Seller product(s), and will not include any further liability for or arising out of any third party products with which Seller's products may be installed, combined, or used. **TO THE FULL EXTENT ALLOWED BY LAW, THE FOREGOING LIMITED WARRANTY AND REMEDIES ARE EXCLUSIVE AND EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, REPRESENTATIONS, OBLIGATIONS, OR LIABILITIES, WHETHER WRITTEN OR ORAL, EXPRESS OR IMPLIED, STATUTORY OR OTHERWISE, INCLUDING BUT NOT LIMITED TO WARRANTIES, TERMS, OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, CORRESPONDENCE WITH DESCRIPTION, AND NON-INFRINGEMENT, ALL OF WHICH ARE HEREBY EXPRESSLY DISCLAIMED.**

Certain Legal Limitations. When, under applicable law, implied warranties are not allowed to be excluded in their entirety, such warranties will be limited to the duration of the applicable written warranty. For European customers, if any warranty period specified herein is less than the minimum warranty period required by law, the warranty period will be extended to the period required by law, and any terms herein limiting Seller's liability shall not apply insofar as they conflict with mandatory statutory provisions of the Product Liability Act. No employee, agent, dealer or other person is authorized to modify, vary, or extend Seller's warranties as set out herein or to assume for Seller any other liability in connection with its products. **Service & Support.** To obtain warranty service or technical assistance contact Seller by phone (Toll Free: 800-426-7368), email: info@hantech.com, or web: www.hantech.com/Warranty & Returned Goods. Concerns regarding service and support may be addressed by writing to Hansen Technologies Corporation, 681 Commerce Street, Burr Ridge, IL 60527, USA.

PRODUCT SPECIFICATIONS AND VALIDATION: All products, when delivered by Seller, will conform to Seller's specifications; however, Buyer is responsible for validation of each specific product application and any use of products as a component of or in conjunction with other products or attachments not supplied by Seller for such purpose, including all necessary testing and qualification, and will put in place all necessary systems and protections to ensure that any failure or defect relating to the products will not result in any other or further damage. Seller reserves the right to discontinue or change the design or specifications of any product or component at any time, and will use commercially reasonable efforts to notify Buyer of any decision to discontinue products or material changes in specifications affecting form, fit or function.

USE RESTRICTIONS & REQUIREMENTS: Buyer is responsible for compliance with all applicable laws, regulations, codes, recommendations, and requirements of government authorities and for obtaining all licenses and permits pertaining to the purchase, shipment, import, export, transfer, sale, disposition, installation, operation, and/or use of the products supplied hereunder, including any use or sale as a component of any non-Seller products, it being understood that Seller makes no warranty of any kind regarding compliance with such requirements. Buyer may not (1) modify, alter, disassemble, or make any changes to any products or items provided by Seller or permit any other party to do so without Seller's prior written consent; (2) import, export, sell, transfer, service, store, handle, distribute or use any product or item supplied hereunder in any manner prohibited by applicable laws and regulations, including all applicable export control laws, restrictions and regulations, or contrary to any written warning or instruction given by Seller herein, in the product documentation, on Seller's website, or otherwise; or (3) make any representations or warranties on behalf of Seller as to the quality, merchantability, fitness for a particular use, or other features of the products. Each party

shall defend, indemnify and hold harmless the other from all liabilities, claims, losses, damages, and expenses (including without limitation reasonable attorneys' fees) arising out of any breach of these terms and conditions except as expressly limited herein.

PROPRIETARY INFORMATION: Buyer acknowledges that Seller's products are based upon and embody various confidential and/or proprietary technology, processes, methods, information, know-how, and trade secrets of Seller. Seller shall exclusively own all inventions, technology, know-how, trade secrets, and other proprietary information of any kind used or embodied in the products, documentation, drawings, specifications, software, and other items furnished by Seller, all intellectual property rights with respect thereto, and all reproductions or derivatives thereof in any form ("Proprietary Information"). Buyer shall neither acquire nor claim any right, title or interest in, and shall exercise reasonable care to maintain the confidentiality of, Seller's Proprietary Information, and shall use the same solely as required for its authorized use of Seller's products as supplied hereunder. Buyer may not directly or indirectly (1) copy, adapt, develop, disassemble, reverse engineer, recast, compile, decompile, translate, or create derivative works from any products or items provided by Seller, or permit any other person to do so, (2) remove, alter, or obscure any copyright, trademark, patent, logo, government restricted rights, or other notices or legends from items provided by Seller, or (3) disclose or use Seller's Proprietary Information for commercial purposes or in a manner detrimental to Seller. Disclosures of Proprietary Information may be made only to Buyer's personnel having a specific need to know and a written obligation to protect such information no less restrictive than the restrictions herein, and Buyer will be responsible for any breach by its personnel. It is agreed that any breach of this Section may cause Seller irreparable harm for which recovery of damages would be inadequate, and that immediate injunctive or other equitable relief is appropriate and available to Seller to prevent any violation, threatened or actual, of this Section, in addition to any other remedies and without proof of actual damage.

LIMITATION OF LIABILITY: No claims, regardless of form, arising out of the products or transactions to which these terms apply may be brought by Buyer more than 2 years after the cause of action arises or performance hereunder is completed or terminated, whichever is earlier. **SELLER'S AGGREGATE LIABILITY IN DAMAGES OR OTHERWISE FOR ANY AND ALL CAUSES WHATSOEVER (INCLUDING BUT NOT LIMITED TO ANY CLAIMS FOR INDEMNIFICATION) SHALL BE LIMITED TO THE PURCHASE PRICE PAID OR PAYABLE TO SELLER FOR THE APPLICABLE PURCHASE ORDER. IN NO EVENT WILL SELLER BE LIABLE FOR ANY SPECIAL, INCIDENTAL, CONSEQUENTIAL, PUNITIVE, EXEMPLARY, OR OTHER INDIRECT LOSSES OR DAMAGES, HOWEVER CAUSED, WHETHER FORESEEABLE OR NOT, AND EVEN IF ADVISED OF THE POSSIBILITY THEREOF. THESE LIMITATIONS WILL APPLY REGARDLESS OF THE FORM OF ACTION, WHETHER CONTRACT, TORT, STRICT LIABILITY, INDEMNIFICATION, OR OTHERWISE, NOTWITHSTANDING THE FAILURE OF THE ESSENTIAL PURPOSE OF ANY LIMITED REMEDY. FOR EUROPEAN CUSTOMERS, THE FOREGOING SHALL BE MODIFIED SOLELY AS REQUIRED UNDER THE PRODUCT LIABILITY ACT, IT BEING AGREED THAT CLAIMS OVER AND ABOVE THOSE UNDER THE PRODUCT LIABILITY ACT WILL NOT BE MADE BY BUYER AGAINST SELLER, AS MANUFACTURER, UNDER ANY THEORY OF LIABILITY, INCLUDING BY MEANS OF INDEMNIFICATION OBLIGATIONS. Buyer acknowledges that these limitations of liability are a material part of the bargain between the parties and are reflected in product pricing, which would be higher without these limitations.**

FORCE MAJEURE: Neither party will be liable for non-performance or delay in performance of any obligation (other than payment of monetary sums due) to the extent caused by events or circumstances beyond its reasonable control and without negligence on its part, provided that the affected party uses reasonable efforts to avoid or remove any causes of nonperformance and continues performance with reasonable dispatch whenever such causes are removed. For delays resulting from such causes, performance will be correspondingly extended.

GOVERNING LAW: The place of performance is exclusively the head office of the company delivering. For all customers, these Terms and Conditions, all transactions to which they may apply, and any disputes arising out of products or services supplied hereunder, shall be governed by the laws of the State of Illinois and the United States of America, excluding any conflict of law provisions thereof, and the courts of the State of Illinois or of the United States located in DuPage County, Illinois will have exclusive jurisdiction for all claims. Buyer hereby submits to the jurisdiction of the foregoing courts, as applicable, for the purpose of any such action. The United Nations Convention on Contracts for The International Sale of Goods, the Uniform Law on the Formation of Contracts for the International Sale of Goods, and any international discovery and service of process conventions will be inapplicable.

RMA RETURN MATERIALS & WARRANTY ITEM PROCEDURES

- Go to www.hantech.com/rma
- Request an RMA number issued to return material
- Provide Original Purchase Order #
- An RMA number must be issued and clearly marked on outside of all boxes shipped back to Hansen Manufacturing (Commerce, GA)
- RMA shipments should be returned to:
 - Hansen Technologies
 - Attn: RMA# _____
 - 3475 Old Maysville Road
 - Commerce, GA 30529 USA

RETURNED GOODS POLICY

Products returned are normally subject to a minimum 30% restocking charge. Restocking charge is based on actual invoiced amount. To ensure accurate and prompt processing of your Return, reference your original purchase order number, invoice number and Return Material Authorization (RMA) number in all communications. Freight on all return shipments must be "PREPAID".

Special construction products, special order pumps and custom length probes are non-returnable and cannot be cancelled once in production.

Any claims by Buyer for omissions, shortages, or discrepancies in pricing shall be waived unless Seller receives notice thereof within 30 days after Buyer's receipt of the shipment.

The following restocking charges apply to new and unused items in original packaging and require no rework to restock.

Time from Invoice Date	Restocking Percent
6 months or less*	30%
Pressure Relief Valves (60 days or less)**	30%

* Higher restocking charges may be applied depending on product condition.

** Pressure relief valves shipped more than 60 days from date code stamped on valve name plate or non-standard pressure settings are non-returnable.

EMERGENCY HOT LINE (866.244.4829)

A Service Fee of \$250 if parts shipment is required.

EXPEDITE FEE

A \$50.00 processing and handling fee will be applied to all expedited orders scheduled for same day ground shipment.

EXPORT RESTRICTIONS

Buyer shall not export or re-export goods in violation of any applicable laws or regulations of the United States or the country in which Buyer obtained them.

MINIMUM BILLING AND PRICING POLICY

VISA, MASTERCARD, AMEX are accepted. Non-standard product order \$300 List Extra. For products requiring CE Mark, please specify when ordering and Add Extra 10% per item. An expedite fee may apply for same day shipping. Material Test Reports (MTR) \$100.00 per line item.

Prices are subject to change without notice.

TECHNICAL BULLETIN UPDATES AND CERTIFICATIONS

Hansen Technologies Corporation strives to offer products which meet and exceed current regulations worldwide. Please visit HANSEN online at www.hantech.com for up-to-date product technical bulletins, certifications regarding CE Mark for PED, ,CRN Registrations, other Statements of Compliance and Safety Precautions.

APPROVED REFRIGERANTS: The following list of refrigerants are approved by Seller and are compatible with our standard gasket material.

R-22 R-134a R-404a R-410 R-507a R-717 R-744 CO2

ANY REFRIGERANT NOT LISTED REQUIRES WRITTEN APPROVAL BY SELLER.



ASIA

EUROPE

CHINA

MIDDLE EAST

NORTH AMERICA

SOUTH AMERICA

HANSEN TECHNOLOGIES CORPORATION

681 Commerce Street, Burr Ridge, Illinois 60527 USA
 Tel: 630.325.1565 Toll: 800.426.7368 Fax: 630.325.1572
 Web: www.hantech.com Email: sales@hantech.com

HANSEN MANUFACTURING & OPERATIONS

3475 Old Maysville Road Commerce, Georgia 30529 USA

